

REMARKS

The Office Action dated September 13, 2007 has been received and carefully noted. The following remarks are submitted as a full and complete response thereto. Claims 1-4, 6-19, 21-34, and 36-49 are currently pending in the application and are respectfully submitted for consideration.

The Office Action rejected claims 1-4, 6-10, 12-19, 21-25, 27-34, 36-40, and 42-47 under 35 U.S.C. §102(e) as being anticipated by Pasanen (U.S. Patent Pub. No. 2007/0109954). This rejection is respectfully traversed for at least the following reasons.

Applicants submit that Pasanen does not constitute a valid prior art reference with respect to the present application. Pasanen has an effective filing date which is after the filing date of the present application. The U.S. publication of Pasanen lists March 12, 2003 as its PCT filing date. However, this appears to be a clerical error since March 12, 2003 is not the PCT filing date of Pasanen. The PCT publication of Pasanen (WO 2005/055507) clearly lists the international filing date of Pasanen as December 3, 2003. If the PCT filing date of Pasanen was in fact March 12, 2003, then the U.S. filing date of June 1, 2006 would be more than 30 months later, which would be too late under §371. Applicants enclose a copy of WO 2005/055507, the PCT publication of Pasanen, showing the PCT filing date of December 3, 2003 for the Examiner convenience.

Accordingly, Pasanen has an effective filing date of December 3, 2003, which is later than both the October 22, 2003 filing date and July 16, 2003 priority date of the

present application. Therefore, Pasanen cannot properly be cited as prior art against the present application. As such, Applicants respectfully request that this rejection be withdrawn and the application allowed.

Claims 11, 26, 41, 48, and 49 were objected to as being dependent upon a rejected base claim, but would be allowable if rewritten in independent form including all of the limitations of the base claim. For at least the reasons discussed above, Applicants submit that the base claims from which claims 11, 26, 41, 48, and 49 depend are in condition for allowance. Therefore, claims 11, 26, 41, 48, and 49 have not been amended to be in independent form.

If for any reason the Examiner determines that the application is not now in condition for allowance, it is respectfully requested that the Examiner contact, by telephone, the applicant's undersigned representative at the indicated telephone number to arrange for an interview to expedite the disposition of this application.

In the event this paper is not being timely filed, the applicant respectfully petitions for an appropriate extension of time. Any fees for such an extension together with any additional fees may be charged to Counsel's Deposit Account 50-2222.

Respectfully submitted,



Majid S. AlBassam
Registration No. 54,749

Customer No. 32294
SQUIRE, SANDERS & DEMPSEY LLP
14TH Floor
8000 Towers Crescent Drive
Tysons Corner, Virginia 22182-2700
Telephone: 703-720-7800
Fax: 703-720-7802

MSA:jf

Enclosure: WO 2005/055507, Parsanen

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
16 June 2005 (16.06.2005)

PCT

(10) International Publication Number
WO 2005/055507 A1

(51) International Patent Classification⁷: **H04L 1/06**

(21) International Application Number:
PCT/IB2003/005587

(22) International Filing Date: 3 December 2003 (03.12.2003)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): **NOKIA CORPORATION** [FI/FT]; Keilalahdentie 4, FIN-02150 Espoo (FI).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **PASANEN**, Pirjo [FI/FT]; Iltatie 19 C 11, FIN-01670 Vantaa (FI). **TIRKKO-NEN**, Olav [FI/FT]; Purontiitynpolku 5 A 6, FIN-00720 Helsinki (FI).

(74) Agent: **COHAUSZ & FLORACK (24)**; Kanzlerstr. 8a, 40472 Düsseldorf (DE).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: EXPLOITING SELECTION DIVERSITY IN COMMUNICATIONS SYSTEMS WITH NON-ORTHONORMAL MATRIX AND VECTOR MODULATION

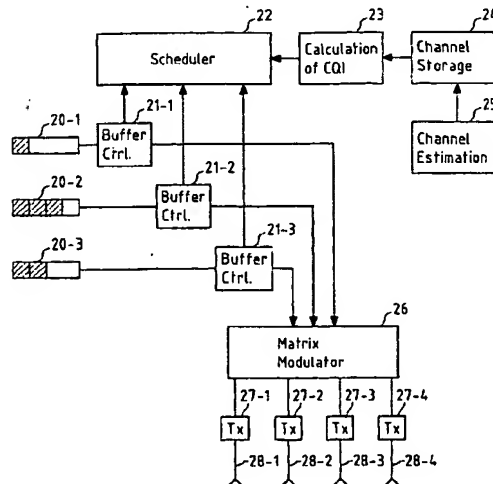

(57) Abstract: The invention relates to methods for scheduling at least one out of K transmission channels k with respective $N_{r,k}$ transmission interfaces and respective $N_{r,k}$ reception interfaces for the transmission of data symbols that are matrix or vector modulated, said method comprising calculating a respective Channel Quality Indicator (CQI) q_k for at least one of said K transmission channels, and scheduling at least one of said K transmission channels for the transmission of said matrix or vector modulated data symbols, wherein said scheduling is at least partially based on said calculated CQIs q_k . The invention further relates to devices, transmitting stations, wireless communication systems, computer programs and computer program products.

**Exploiting selection diversity in communications systems
with non-orthonormal matrix and vector modulation**

Field of the invention

The invention relates to a method for scheduling at least one out of K transmission channels k with respective $N_{t,k}$ transmission interfaces and respective $N_{r,k}$ reception interfaces for the transmission of data symbols modulated according to a non-orthonormal matrix or vector modulation.

Background of the invention

In the context of a wireless communication system, as for instance the Universal Mobile Telecommunications System (UMTS), scheduling can be formulated in terms of a preference function f_k that is calculated for at least one transmission channel out of $k=1, \dots, K$ transmission channels for a block of substantially orthogonal resources (e.g. frequency, subcarriers, spreading codes, time slots, spatial/polarization eigenmodes) to be scheduled simultaneously. The transmission channel or channels that have the largest value of f_k , or a value of f_k that is above some pre-defined limit are used for transmitting data using the scheduled resources. In this context, a transmission channel k may for instance describe the physical propagation channel between a single- or multi-antenna transmitter and a single- or multi-antenna receiver. There may be only one or several transmitters, and, correspondingly, there may be one or several receivers. Said transmitters and receivers may represent base stations, mobile stations or relay stations of a wireless communication system. A transmission channel k can be defined for both the up-

and downlink. A transmission channel k may further relate to a channel between only a sub-group of transmit antenna elements of a multi-antenna transmitter and a single- or multi-antenna receiver, or to a channel between a single or multi-antenna transmitter and a sub-group of antenna elements of a receiver.

The preference function f_k for a transmission channel k may be of the form:

$$f_k = f(u, d_k, z_k, h_k, c_k, CQIm_k, CQIe_k, CQIs_{k,...})$$

Here, u is a parameter that describes the general status of the transmission queue, and the remaining parameters are specific for the transmission channel $k=1, \dots, K$. Thus d_k is the delay experienced by transmission channel k , i.e. the time that the next packet for/from transmission channel k has spent in the queue, z_k is the size of the next packet scheduled for her (or scheduled by her for transmission, in uplink operation), h_k describes the history, taking into account the amount of data transmitted via transmission channel k during the immediate past, and c_k is her possible priority class, possibly based on the type of subscription or terminal, and/or the type of data. The link-specific Channel Quality Indicators (CQI) that scheduling may be based on, are

- $CQIm_k$, which determines the transmission mode of transmission channel k . The mode selection may be based on side information, based on measurements at the transmitter, or feedback from a receiver. In particular, $CQIm_k$ determines the rate of transmission channel k , and possibly the used feedback-based beamforming, the

Adaptive Space-Time Modulation scheme chosen (matrix/vector modulation, space-time coding), the rate of the concatenated channel code, and/or the modulation alphabets.

- $CQIe_k$, which indicates the expected error rate of the transmission mode indicated by $CQIm_k$, and
- $CQIs_k$, which indicates the speed of transmission channel k , i.e. the channel coherence time.

Based on these parameters (or a subset of them), a scheduler can decide which transmission channel is suited for data transmission, taking into account overall throughput, fairness, delays etc., when applicable. The parts of f_k that do not depend on the radio link are the domain of higher layer protocols. The CQIs, however, are in intimate relationship to the physical layer, and are to be designed in accordance to the physical layer algorithms.

When considering the physical layer, the preference functions f_k may be used in order to minimize the transmission power, maximize the rate, or optimize performance. Often, the physical and higher layer algorithms involve an automatic retransmission request (ARQ) protocol. In these cases, maximizing system capacity typically requires that the frame or block error rate is close to a given optimal value. Thus the preference functions f_k may be used to choose the transmission channel that provides the highest rate with the maximum allowed transmission power, reaching a target error performance.

If scheduling is based on CQI_{e_k} , i.e. CQIs that correlate with the expected error performance, the most clear cut way to measure the performance of scheduling is to measure the performance of selection diversity. This means that a number K of transmission channels are considered that have some type of channel statistics. Due to this statistical nature of the K transmission channels, scheduling for example one specific transmission channel out of the K transmission channels that actually has the optimum transmission channel characteristics, for instance the lowest fading or path loss, for data transmission achieves superior performance as compared to transmitting on an arbitrarily chosen transmission channel. Thus, as multi-user diversity is available to a transceiver in a communication system with multiple users to receive or transmit signals, or antenna diversity is available to a receiver that deploys multiple antenna elements to receive a signal that has been transmitted by a transmitter using only a subset of the multiple receiver elements or to transmit a signal using only a subset of the multiple transmitter elements, or frequency diversity is available when a signal is transmitted at different portions of the available channel bandwidth, selection diversity is available for the scheduler when it is offered the degree of freedom to choose from a variety of transmission channels between different transceivers or their elements.

For optimal performance of selection diversity, the transmission channel with the lowest predicted bit error rate (BER) may be scheduled for transmission. This results in a decreased average error rate. However, for a Multiple-Input-Multiple-Output (MIMO) channel, scheduling

based on direct evaluation of BER requires heavy computation.

Prior art document "On transmit diversity and scheduling in wireless packet data" by A. G. Kogiantis, N. Joshi, and O. Sunay, published in IEEEcomm, June 2001, vol. 8, pp. 2433-2437, discloses scheduling in a Multiple-Input-Single-Output (MISO) channel, wherein, among others, an orthonormal diversity transmission scheme (Space-Time Transmit Diversity, STTD) is compared to a single-antenna transmission scheme without diversity. In both schemes, a transmitter (either with two transmit antennas and STTD or with a single antenna) schedules one out of K transmission channels, wherein each respective transmission channel is defined by the physical propagation channel between the two or one transmit antennas at the transmitter and the single antenna at the respective receiver, for a data transmission, wherein scheduling is based on the maximum Carrier-to-Interference power ratio (C/I) for each transmission channel.

The STTD scheme as deployed in the Kogiantis reference can be considered as a matrix modulation scheme, which may be defined as a mapping of modulation symbols onto non-orthogonal spatial resources and orthogonal resources, as for instance time slots or symbol periods, frequency carriers, orthogonal codes, etc., or any combination of these.

In matrix modulation schemes, diversity may be applied. For instance, in a space-time matrix modulation scheme, at least one of said modulation symbols may be mapped to a first antenna element in a first symbol period and to a

second antenna element in a second symbol period. Similarly, in a space-frequency matrix modulation scheme, at least one of said modulation symbols may be mapped to a first antenna element and transmitted with a first carrier frequency and to a second antenna element and transmitted with a second carrier frequency.

If modulation symbols are mapped to the non-orthogonal spatial resources only, so-called vector modulation is performed, and only spatial diversity is available.

In the sequel of this introduction, space-time matrix modulation methods will be presented as an example of orthonormal and non-orthonormal matrix modulation methods. The orthogonal resource is then represented by the T symbol periods (or time slots) to which a block of data symbols is mapped. However, the presented matrix modulation methods are readily applicable to matrix modulation that employs the frequency domain, the code domain, the eigenmode domain or polarization domain as orthogonal resource instead of the time domain.

A space-time matrix modulator employing N_t transmit antennas and T symbol periods is defined by a $T \times N_t$ modulation matrix X . The modulation matrix X is a linear function of the Q complex-valued modulation symbols x_n , $n=1, \dots, Q$ to be transmitted by the N_t -antenna transmitter during T symbol periods. Modulation symbols may for instance obey the Binary Phase Shift Keying (BPSK), Quaternary Phase Shift Keying (QPSK) or Quadrature Amplitude Modulation (QAM) symbol alphabet. The modulation matrix X thus basically defines when modulation symbols x_n with $n=1, \dots, Q$ and/or functions of said modulations symbols x_n such as $-x_n$, x_n^* or $-x_n^*$ are

transmitted from which transmit antenna $n_t=1, \dots, N_t$ at which time instance $t=1, \dots, T$. In this context, the superscript operator "*" denotes the conjugate-complex of a complex number. The matrix modulation then can be understood as a mapping of modulation symbols and functions thereof to N_t respective data streams that are transmitted by N_t respective transmit antenna elements of a transmit antenna during T symbol periods. For the STTD scheme as applied in the Kogiantis reference, the modulation matrix X is defined according to the so-called Alamouti Space-Time code with $T=2$ and $N_t=2$ as

$$X = \begin{bmatrix} x_1 & x_2 \\ -x_2^* & x_1^* \end{bmatrix}. \quad (1)$$

With $N_{k,r}$ receive antennas at the reception side of the transmission channel k , the signal model reads as:

$$Y_k = X \cdot H_k + N_k, \quad (2)$$

wherein Y_k is a $T \times N_{k,r}$ matrix of signals $y_{k,ij}$ received at receive antenna element $j=1, \dots, N_{k,r}$ during symbol period $i=1, \dots, T$, wherein the elements $h_{k,ij}$ with $i=1, \dots, N_t$ and $j=1, \dots, N_{k,r}$ of the $N_t \times N_{k,r}$ channel matrix H_k define the flat fading propagation channel between transmit antenna element i and receive antenna element j , and wherein the $T \times N_{k,r}$ matrix N_k represents the noise received in symbol period $t=1, \dots, T$ at receive antenna element $n_k=1, \dots, N_{k,r}$.

Lumping together the effects of matrix modulation as defined by the matrix X and the propagation effects as defined by the channel matrix H_k yields a complex-valued

$TN_{k,r} \times Q$ equivalent channel matrix G_k with an equivalent signal model:

$$y_k = G_k \cdot x + n_k, \quad (3)$$

wherein the $TN_{k,r}$ -dimensional vector y_k contains the signals received during T symbol periods at the $N_{k,r}$ receive antenna elements at the reception side of transmission channel k , or functions thereof such as the conjugate-complex receive signal, the negative receive signal or the negative conjugate-complex receive signal; the Q -dimensional vector x contains the Q complex-valued modulation symbols x_n , $n=1, \dots, Q$ that are modulated by the matrix modulation onto N_t transmit antenna elements in T symbol periods; and the $TN_{k,r}$ -dimensional vector n_k contains the noise received at the receive antenna elements during the T symbol periods.

For the STTD scheme, the equivalent channel matrix G_k has the following shape:

$$G_k = \begin{bmatrix} h_{k,11} & h_{k,21} \\ h_{k,21}^* & -h_{k,11}^* \end{bmatrix}, \quad (4)$$

and the equivalent system model reads as

$$\begin{pmatrix} y_{k,11} \\ y_{k,21}^* \end{pmatrix} = \begin{bmatrix} h_{k,11} & h_{k,21} \\ h_{k,21}^* & -h_{k,11}^* \end{bmatrix} \cdot \begin{pmatrix} x_1 \\ x_2 \end{pmatrix} + \begin{pmatrix} n_{k,11} \\ n_{k,21} \end{pmatrix}. \quad (5)$$

It is readily seen from equation (5) that both the effects of matrix modulation and channel propagation are now contained in the equivalent channel matrix G_k , so that

in the equivalent signal model of equation (5), the original modulation symbols x_n and not functions of the modulation symbols x_n are multiplied with the equivalent channel matrix G_k . With the equivalent channel matrix G_k , the Equivalent Channel Correlation Matrix (ECCM) R_k can be defined as

$$R_k = G_k^H \cdot G_k, \quad (6)$$

wherein the superscript operator " H " denotes the Hermitian conjugate of a matrix.

For the STTD scheme, it is easily seen that the ECCM is a diagonal matrix with

$$R_{k,STTD} = \begin{bmatrix} |h_{k,11}|^2 + |h_{k,21}|^2 & 0 \\ 0 & |h_{k,11}|^2 + |h_{k,21}|^2 \end{bmatrix}.$$

The ECCM can be interpreted as applying a matched filter to the equivalent channel matrix G_k , so that a matched filter estimate of the vector x that contains the Q modulation symbols x_n with $n=1, \dots, Q$ is obtained as

$$\hat{x} = G_k^H \cdot y_k = R_{k,STTD} \cdot x_k + G_k^H \cdot n_k.$$

When the power of the noise contribution n_k can be neglected as compared to the power of the receive signal y_k , the matched filter estimate \hat{x} is basically given by the term $R_{k,STTD} \cdot x_k$, i.e. the matched filter estimates \hat{x}_n are simply the modulation symbols x_n scaled by a real-valued factor $|h_{k,11}|^2 + |h_{k,21}|^2$ that is identified as the sum of the

powers of the channels $h_{k,ij}$ between the $i=1, \dots, N_t$ transmit antennas and the $i=1, \dots, N_{k,r}$ receive antennas.

The ECCM according to the STTD matrix modulation scheme only has non-zero entries on the main diagonal and thus does not cause self-interference between modulation symbols x_n in the matched filter estimates \hat{x}_n . Moreover, the diagonal elements are all equal, thus the ECCM is proportional to the identity matrix. Matrix modulation schemes with ECCM proportional to the identity matrix will be denoted as orthonormal matrix modulation schemes in the sequel, whereas matrix modulation schemes with ECCMs not proportional to the identity matrix will be denoted as non-orthonormal matrix modulation schemes.

Figs. 1 and 2 show the essential features regarding scheduling in a selection diversity setting with STTD as disclosed in the Kogiantis reference. In particular, scheduling performance is investigated with orthonormal matrix modulation (STTD, $N_t=2$) and without matrix modulation ($N_t=1$) for $N_{k,r}=1$ and different numbers of transmission channels K , wherein the selection of a transmission channel for a data transmission is based on the maximum C/I at the reception side of that transmission channel.

Fig. 1 shows the scheduling performance in terms of $\log_{10}(\text{BER})$ as a function of the ratio E_b/N_0 of energy per bit E_b and noise power density N_0 (assuming an Additive White Gaussian Noise (AWGN) process at the reception side of the transmission channel) in dB. Results for QPSK modulation and independent identically distributed (i.i.d.) flat Rayleigh-fading channels are depicted in separate figures for $K = 1, 2, 4$ and 8 transmission

channels with (dashed line) or without STTD (solid line), respectively.

It is observed that when there are up to $K = 4$ transmission channels, scheduling with STTD outperforms scheduling without transmit diversity, because the (uncoded) BER with STTD is significantly smaller than the (uncoded) BER without STTD across the complete E_b/N_0 regime. However, for $K = 8$ transmission channels, scheduling without STTD outperforms STTD-based scheduling up to a BER 10^{-3} . In the high E_b/N_0 regime, the transmit diversity of STTD still gives better performance.

The reason for this can be seen in Fig. 2, where Probability Distribution Functions (PDFs) of the Signal-to-Noise Ratio (SNR) at the scheduled receiver (with Maximum Ratio Combining (MRC) for STTD) are plotted for i.i.d. Rayleigh fading channels $h_{k,ij}$ with $E\{|h_{k,11}|^2\} = 1$, once again for the cases with (dashed line) and without STTD (solid line) and for different numbers of transmission channels $K=1, 2, 4$ and 8 among which scheduling is performed. It can be clearly seen from the reduced extension and the pronounced maxima of the PDFs how STTD reduces the fluctuations in channel power. Also, it is evident that STTD is not able to change the average SNR of the channel, it just improves bad channels with the price of making good ones worse. Thus a significant portion of transmission channels, that have a strong channel from one transmit antenna and a weak from the other, have worse received SNR after MRC combining (see Fig. 2, upper left corner). With an increasing number K of transmission channels, a non-STTD transmission can always be scheduled to a transmission channel that would have had a worse channel if STTD was applied. Thus for

multiple transmission channels K , scheduling without STTD works better.

The situation regarding combinations of orthonormal matrix modulation (STTD) and scheduling as disclosed in the Kogiantis reference can thus be summarised as:

- For more than $K=5$ transmission channels, orthonormal matrix modulation (STTD) performs worse than a single antenna transmission as a component in a selection diversity scheme with max C/I-based scheduling, at BER 10^{-3} .
- If more than $K=3$ transmission channels are scheduled simultaneously, STTD and other orthonormal matrix modulations are of no practical use.

Summary of the invention

In view of the above-mentioned problems, it is thus an object of the present invention to improve communications systems that perform scheduling in combination with matrix and vector modulation in a selection diversity setting.

It is proposed a method for scheduling at least one out of K transmission channels $k=1, \dots, K$ with respective $N_{t,k}$ transmission interfaces and respective $N_{r,k}$ reception interfaces for the transmission of data symbols modulated according to a non-orthonormal matrix modulation that modulates data symbols in both a non-orthogonal spatial domain and at least one orthogonal domain, wherein at least one Equivalent Channel Matrix (ECM) G_k can be defined that transforms said data symbols into data symbols that have been matrix modulated, transmitted over

$N_{t,k}$ transmission interfaces and received at $N_{r,k}$ reception interfaces of one of said transmission channels $k=1, \dots, K$, and wherein an Equivalent Channel Correlation Matrix (ECCM) $R_k = G_k^H \cdot G_k$ of said at least one ECM G_k is not proportional to the identity matrix, said method comprising calculating a respective Channel Quality Indicator (CQI) q_k for at least one of said K transmission channels, and scheduling at least one of said K transmission channels for the transmission of said matrix modulated data symbols, wherein said scheduling is at least partially based on said calculated CQIs q_k .

Said transmission channel k may for instance describe the physical propagation channel between a single- or multi-antenna transmitter and a single- or multi-antenna receiver. There may be only one or several transmitters, and, correspondingly, there may be one or several receivers. Said transmitters and receivers may represent base stations, mobile stations or relay stations of a wireless communication system. A transmission channel k may be defined for both the up- and downlink. A transmission channel k may further relate to a channel between only a sub-group of transmit antenna elements of a multi-antenna transmitter and a single- or multi-antenna receiver, or to a channel between a single or multi-antenna transmitter and a sub-group of antenna elements of a receiver.

Data symbols, which may for instance represent BPSK, QPSK or QAM modulation symbols, are matrix modulated and transmitted via said respective transmit interfaces of said transmission channel k . Said matrix modulation represents a mapping of data symbols onto non-orthogonal spatial resources and (substantially) orthogonal

resources, as for instance time slots, frequency carriers, orthogonal codes, spatial or polarisation eigenmodes, or combination of these etc. Said matrix modulation may be defined by a modulation matrix, that is a linear function of said data symbols that are to be transmitted via the $N_{t,k}$ transmission interfaces of said transmission channel k . For space-time matrix modulation, said modulation matrix may define when data symbols and/or functions of said data symbols are transmitted from which transmit interface in which symbol period. The space-time matrix modulation then can be understood as a mapping of data symbols and functions thereof to N_t respective data streams that are transmitted by N_t respective transmit interfaces during T symbol periods. Similarly, in space-frequency matrix modulation, the modulation matrix defines which symbols are transmitted from which transmit interface with which frequency. Instead of time and frequency, further orthogonal or substantially orthogonal domains may be used, for instance the code domain, polarization domain, eigenmode domain, etc.

Said transmission of said matrix modulated data symbols over one of said transmission channels $k=1, \dots, K$ may be defined by a transmission channel matrix which contains one respective entry to characterise the attenuation and phase shift the data symbols undergo when being transmitted on a respective channel between a transmit interface and a receive interface. Said transmission channel may be a wired or wireless transmission channel.

The effects of said modulation matrix and said transmission channel matrix are combined in said equivalent channel matrix G_k , which then describes the

matrix modulation of data symbols and the transmission and reception of said matrix modulated data symbols using the transmission channel k between the transmission interfaces and the reception interfaces. Said transmission interfaces of said transmission channel may be connected to one or several transmitters, and, correspondingly, the reception interfaces of said transmission channel may be connected to one or more receivers.

The ECCM R_k of said equivalent channel is not proportional to the identity matrix, so that the matrix modulation scheme is classified as non-orthonormal matrix modulation scheme. Thus when a matched filter is applied at the receiver side of the transmission channel k , the matched filter estimate of the data symbols suffers from self-interference between the data symbols. A non-orthonormal matrix modulation scheme may for instance be constructed by the linear combination of orthonormal matrix modulation techniques such as space-time codes, space-frequency codes or the like.

Scheduling is performed by a scheduling instance at either the transmission side or the reception side of said transmission channel to decide which of the K transmission channels are best suited to be used for transmitting data symbols that are matrix modulated by and subsequently transmitted to the receiver side of the said transmission channel.

Scheduling is at least partially based on CQIs q_k that have been computed for at least one of said K respective transmission channels. It may be preferred that CQIs q_k are computed for at least two of said K respective transmission channels. Then scheduling may be determined

by comparison of said CQIs which transmission channel is more suited for transmission of data symbols. Scheduling may also be performed in a way that once the CQI for some transmission channel is above a set limit then that transmission channel is used - therefore in some cases in may be enough to calculate only one CQI.

CQIs may not have to be calculated for all the K transmission channels between which the selection is made: prior knowledge on CQIs of transmission channels or some other means to avoid repeated calculation may be applied also.

The K transmission channels to be selected from may not all use the same modulation, for example some of them may use orthonormal matrix modulations, and others may use non-orthonormal matrix modulation, vector modulation, single antenna transmission or diversity transmission. Correspondingly, the CQIs for the respective transmission channels may be computed in different fashions depending on the modulation technique that is applied for the data symbols that are to be transmitted via said respective transmission channel.

At least one ECM G_k can be defined to describe the non-orthonormal matrix modulation of said data symbols and their transmission over a specific transmission channel, which may be entirely defined by a channel matrix H_k . The ECCM R_k of said ECM G_k then is not proportional to the identity matrix, due to the fact that the matrix modulation is non-orthonormal. Said ECCM can then be either a non-diagonal matrix, or a diagonal matrix with unequal entries on the diagonal. The non-diagonality reflects the fact that interference arises between the

matrix modulated data symbols that can not simply be removed by matched filtering at the receiving side of the specific transmission channel. If matrix modulation is performed for more than one of the K transmission channels, more than one ECM G_k with a respective ECCM R_k can be defined. However, only the ECCMs R_k of the transmission channels on which non-orthonormal matrix modulation is performed will not be proportional to the identity matrix, whereas the ECCMs of transmission channels that use orthonormal matrix modulation will be proportional to the identity matrix.

Depending on the definition of the transmission channels, scheduling may be applied to select between multiple users in the uplink or downlink of a wireless communication system, or to select between multiple groups of Tx antennas, where matrix modulation is used on the selected subgroup of antennas. Furthermore, if a receiver may be equipped with less RF-circuitry than antenna elements, the receiver may select the best antenna/antennas to receive a transmission with. If the transmitter uses matrix modulation, each possible choice of receive antennas at the receiver is interpreted as a transmission channel according to this invention. The receiver then may choose the (set of) receive antenna(s) based on CQIs disclosed in this invention.

Scheduling may be performed in the time, frequency or code dimension or any combination of these, for example the matrix modulation can be performed in frequency, but the scheduling in both time and freq. For instance, based on said at least one calculated CQI, a scheduler may determine which transmission channel is scheduled for the next time slot, or which transmission channel is

scheduled for a sub-carrier, polarization, spatial eigenmode, etc.

Scheduling may be further applied in a handover situation to select between multiple base stations in uplink or downlink transmission. In the downlink, this may require cooperation between multiple base stations.

One or more transmission channels may be scheduled for transmissions of matrix modulated data symbols, simultaneously. On the receiving side of the transmission channel, a receiver may be equipped with one or more receive interfaces and apply receive diversity combining techniques.

Thus in contrast to the prior art approach of performing scheduling in combination with orthonormal matrix modulation in a selection diversity setting, which, for increasing numbers of transmission channels proves to be of inferior performance than scheduling without transmit diversity, according to the present invention, scheduling is performed in combination with non-orthonormal matrix modulation in a selection diversity setting. The non-orthonormal matrix modulation scheme can be considered to introduce additional diversity into the equivalent channels between and thus proves to be superior to both the orthonormal matrix modulation approach and the approach without transmit diversity.

According to the method of the present invention, it may be preferred that said respective CQI q_k is derived for at least one of said K transmission channels from said ECCM R_k .

The at least one ECCM R_k corresponding to the at least one ECM G_k contains both the effects of matrix modulation and the transmission channel and is thus especially suited as a basis for scheduling. The equivalent channel matrices G_k are advantageously known by the scheduler when scheduling is performed.

According to the method of the present invention, it is preferred that said respective CQI q_k is calculated for at least one of said K transmission channels as a function of the determinant of a linear function of said ECCM R_k .

The determinant of the ECCM R_k has a strong correlation with the BER that is achieved when data symbols are matrix modulated and transmitted via a transmission channel k as prescribed by the equivalent channel matrix G_k . Said strong correlation to the BER causes the scheduling to be based on the expected error rate of the transmission and thus allows scheduling to reduce the average error rate in a wireless communication system. The correlation may be even further enhanced by considering the determinant of a constant times the identity matrix plus the ECCM R_k , i.e. $\det(aI + R_k)$, and adjusting the constant a according to the used transmission and detection scheme. The constant a may also be chosen equal to zero. Said function of said determinant may for instance be a power or a root of said determinant, or a multiple thereof, or further mathematical functions.

According to the method of the present invention, it may also be preferred that said respective CQI q_k is calculated for at least one of said K transmission channels as a function of the trace of said ECCM R_k .

The trace of said ECCM also exhibits a strong correlation with the BER that is achieved when data symbols are matrix modulated and transmitted via a transmission channel k as prescribed by the equivalent channel matrix G_k . Furthermore, the computational costs for calculating the trace of an unstructured ECCM R_k are comparatively low.

According to the method of the present invention, it may also be preferred that said respective CQI q_k is calculated for at least one of said K transmission channels as a function of the trace of the inverse of said ECCM R_k .

The trace of the inverse of said ECCM also exhibits a strong correlation with the BER that is achieved when data symbols are matrix modulated and transmitted via a transmission channel k as prescribed by the equivalent channel matrix G_k .

Alternatively, any combination of the above-mentioned calculation methods for the CQIs, for instance a function of the determinant, the trace or the trace of the inverse of the ECCM, or some other function of the ECCM, may be taken as the CQI. For example, the determinant of the matrix $(aI + \rho R_k)$ can be interpreted in this way, wherein I denotes the identity matrix and a is a constant. This may be expanded in the carrier-to-interference-and-noise power ratio ρ , and coefficients of this expansion are the trace of R_k , the determinant of R_k and other symmetric polynomials of R_k . The constant a may be adjusted according to the used transmission and reception scheme.

According to the method of the present invention, it is preferred that said respective CQI q_k is calculated for at least one of said K transmission channels as a function of the elements of a channel matrix H_k , which defines said at least one transmission channel, and wherein said function is derived from said ECCM R_k under exploitation of the structural properties of said ECCM R_k .

Said channel matrix H_k defines the physical propagation channel between the respective transmission interfaces and the respective reception interfaces of said at least one transmission channel. Preferably said channel matrix H_k defines the transmission channel for which said at least one ECM G_k can be defined. Said equivalent channel matrix G_k then represents the combination of a modulation matrix and said channel matrix H_k . Due to the structure of the modulation matrix, which is inherited by said equivalent channel matrix G_k , also the ECCM R_k possesses a structure that can be exploited to save computations when calculating the determinant or trace or other functions of the ECCM R_k . In particular, closed-form expressions for the CQIs q_k can be derived that may only depend on single elements of the channel matrix H_k . Instead of having to compute the ECCM R_k itself and then to calculate the CQI q_k from said ECCM R_k when calculating the CQI q_k for a transmission channel k during scheduling, only said computationally efficient closed-form expression in the elements of the channel matrix H_k has to be calculated. For preferred embodiments, providing said simple closed-form expressions significantly reduces the complexity of calculating the CQI q_k for matrix modulators down to the $2Q$ -th root, where Q is the number of data symbols in the matrix modulator.

The structure of the ECCM R_k may equally well be exploited at the receiving side of the transmission channel when estimating the received matrix modulated data symbols by means of equalisation or multi-user detection. In particular, computation of the determinant or the inverse of the ECCM R_k is vastly simplified by exploiting its structure.

It is understood that, if all of the K transmission channels $k=1, \dots, K$ are suited for the transmission of non-orthonormally matrix modulated data symbols, each of said transmission channels k may be characterized by a respective channel matrix H_k , respective ECM G_k and respective ECCM R_k , and the respective CQI q_k may then be calculated for each of these K transmission channels from the respective R_k or H_k . Scheduling then may be based on the comparison of all of these respective CQIs q_k .

According to a first embodiment of the present invention, said non-orthonormal matrix modulation is so-called "ABBA" non-orthonormal matrix modulation that maps a block of 4 data symbols onto $N_{t,k}=4$ transmission interfaces in 4 units of said at least one orthogonal domain and is based on the non-orthonormal combination of two Space-time Transmit Diversity (STTD) codes. Said units of said at least one orthogonal domain may for instance be time slots or frequency sub-carriers, so that said non-orthonormal matrix modulation then becomes a space-time or space-frequency matrix modulation, respectively. An example of an orthonormal STTD code is given by the transpose of the Alamouti code in equation (1).

According to said first preferred embodiment of the present invention, said ECCM R_k is of the form

$$R_k = \begin{bmatrix} p_k & 0 & n_k & 0 \\ 0 & p_k & 0 & n_k \\ n_k & 0 & p_k & 0 \\ 0 & n_k & 0 & p_k \end{bmatrix}, \text{ and}$$

p_k and n_k are real-valued functions of the elements of said channel matrix H_k .

This structure of the ECCM R_k is for instance encountered in the so-called "ABBA" non-orthonormal matrix modulation scheme. If being applied as space-time matrix modulation, the corresponding modulation matrix contains two STTD blocks X_A and X_B (cf. the transpose of equation (1)) that modulate 4 data symbols onto 4 transmit interfaces during 4 symbol periods, so that in effect 1 symbol is transmitted per symbol period (so-called symbol rate 1 matrix modulation).

According to said first preferred embodiment of the present invention, said respective CQI q_k is preferably calculated for at least one of said K transmission channels as a function of $((a + p_k)^2 - n_k^2)$, and wherein a is a constant value. Said respective CQI q_k thus is efficiently computed from the real-valued functions p_k and n_k that only depend on the elements of said channel matrix H_k . The constant a may be adjusted according to the used transmission and reception scheme.

According to a second preferred embodiment of the present invention, said non-orthonormal matrix modulation is a DABBA non-orthonormal matrix modulation that maps a block of 8 data symbols onto $N_{t,k}=4$ transmission interfaces in 4

units of said at least one orthogonal domain and is based on the non-orthonormal combination of four STTD codes. Said units of said at least one orthogonal domain may for instance be time slots or frequency sub-carriers, so that said non-orthonormal matrix modulation then becomes a space-time or space-frequency matrix modulation, respectively. An example of an orthonormal STTD code is given by the transpose of the Alamouti code in equation (1).

According to said second preferred embodiment of the present invention, said ECCM R_k is of the form

$$R_k = \begin{bmatrix} p_{k,1} + p_{k,2} & 0 & n_{k,1} & 0 & p_{k,1} - p_{k,2} & 0 & i \cdot n_{k,2} & s_k^* \\ 0 & p_{k,1} + p_{k,2} & 0 & n_{k,1} & 0 & p_{k,1} - p_{k,2} & -s_k & i \cdot n_{k,2} \\ n_{k,1} & 0 & p_{k,1} + p_{k,2} & 0 & i \cdot n_{k,2} & -s_k^* & -p_{k,1} + p_{k,2} & 0 \\ 0 & n_{k,1} & 0 & p_{k,1} + p_{k,2} & s_k & i \cdot n_{k,2} & 0 & -p_{k,1} + p_{k,2} \\ p_{k,1} - p_{k,2} & 0 & i \cdot n_{k,2} & s_k^* & p_{k,1} + p_{k,2} & 0 & n_{k,1} & 0 \\ 0 & p_{k,1} - p_{k,2} & -s_k & i \cdot n_{k,2} & 0 & p_{k,1} + p_{k,2} & 0 & n_{k,1} \\ i \cdot n_{k,2} & -s_k^* & -p_{k,1} + p_{k,2} & 0 & n_{k,1} & 0 & p_{k,1} + p_{k,2} & 0 \\ s & i \cdot n_{k,2} & 0 & -p_{k,1} + p_{k,2} & 0 & n_{k,1} & 0 & p_{k,1} + p_{k,2} \end{bmatrix}$$

wherein $p_{k,1}$, $p_{k,2}$, $n_{k,1}$ and $n_{k,2}$ are real-valued functions of the elements of said channel matrix H_k and wherein s_k is a complex-valued function of the elements of said channel matrix H_k . This structure of the ECCM R_k is for instance encountered in the so-called "DABBA" non-orthonormal matrix modulation scheme. If being applied as space-time matrix modulation scheme, the corresponding modulation matrix comprises linear combinations of 4 STTD blocks X_A , X_B , X_C and X_D and modulates 8 data symbols onto 4 transmit interfaces during 4 symbol periods, so that in effect 2 symbols are transmitted per symbol period (so-called symbol rate 2 matrix modulation).

According to said second preferred embodiment of the present invention, said respective CQI q_k is preferably calculated for at least one of said K transmission channels as a function of

$\left(4 \cdot p_{k,1} \cdot p_{k,2} + (p_{k,1} + p_{k,2})(a^2 + 2 \cdot a) + n_{k,1}^2 - n_{k,2}^2 + |s_k|^2\right)^4$, and wherein a is a constant value. Said respective CQI q_k thus is efficiently computed from the real-valued functions $p_{k,1}$, $p_{k,2}$, $n_{k,1}$ and $n_{k,2}$ and the complex valued function s_k that only depend on the elements of said channel matrix H_k . The constant a may be adjusted according to the used transmission and reception scheme.

According to a third preferred embodiment of the present invention, said non-orthonormal matrix modulation is a TSTTD non-orthonormal matrix modulation that maps a block of 4 data symbols onto $N_{t,k}=2$ transmission interfaces in 2 units of said at least one orthogonal domain and is based on the non-orthonormal combination of two STTD codes.

Said units of said at least one orthogonal domain may for instance be time slots or frequency sub-carriers, so that said non-orthonormal matrix modulation then becomes a space-time or space-frequency matrix modulation, respectively. An example of an orthonormal STTD code is given by the transpose of the Alamouti code in equation (1).

According to said third preferred embodiment of the present invention, said ECCM R_k is of the form

$$R_k = \begin{bmatrix} p_{k,1} + p_{k,2} & 0 & p_{k,1} - p_{k,2} & s_k \\ 0 & p_{k,1} + p_{k,2} & s_k^* & p_{k,2} - p_{k,1} \\ p_{k,1} - p_{k,2} & s_k & p_{k,1} + p_{k,2} & 0 \\ s_k^* & p_{k,2} - p_{k,1} & 0 & p_{k,1} + p_{k,2} \end{bmatrix},$$

wherein $p_{k,1}$ and $p_{k,2}$ are real-valued functions of the elements of said channel matrix H_k and wherein s_k is a complex-valued function of the elements of said channel matrix H_k . This structure of the ECCM R_k is for instance encountered in the so-called "Twisted or Twice STTD (TSTTD)" non-orthonormal matrix modulation scheme. If being applied as a space-time matrix modulation, the corresponding modulation matrix is represented by the sum of a STTD block X_A and a STTD block X_B (cf. the transpose of equation (1)) that modulates 4 data symbols onto 2 transmit interfaces during 2 symbol periods, so that in effect 2 symbols are transmitted per symbol period (so-called rate 2 matrix modulation).

According to the third preferred embodiment of the present invention, said respective CQI q_k is preferably calculated for at least one of said K transmission channels as a function of $(\det(aI + H_k^H H_k))$, and wherein a is a constant value. The respective CQI q_k thus can be directly determined from the transmission channel matrix H_k without requiring the actual computation of the ECCM R_k . The constant a may be adjusted according to the used transmission and reception scheme.

According to the method of the present invention, it may be preferred that said non-orthonormal matrix modulation is a DSTTD non-orthonormal matrix modulation that maps a block of 4 data symbols onto $N_{t,k}=4$ transmission interfaces in 2 units of said at least one orthogonal

domain and is based on the non-orthonormal combination of two STTD codes.

Said units of said at least one orthogonal domain may for instance be time slots or frequency sub-carriers, so that said non-orthonormal matrix modulation then becomes a space-time or space-frequency matrix modulation, respectively. An example of an orthonormal STTD code is given by the transpose of the Alamouti code in equation (1).

According to the method of the present invention, it is preferred that said non-orthonormal matrix modulation comprises space-time or space-frequency coding. The modulation matrix of said matrix modulation may for instance represent a linear combination of STTD blocks, or may contain STTD blocks or linear combinations or functions thereof as sub-matrices.

According to the method of the present invention, it is preferred that said non-orthonormal matrix modulation comprises a combination of at least two orthonormal matrix modulations. For instance, a modulation matrix that defines said matrix modulation may be the sum of two orthonormal STTD blocks, so that a rate 2 non-orthonormal matrix modulation is obtained instead of a rate 1 orthonormal matrix modulation as represented by a STTD block.

It is further proposed a method for scheduling at least one out of K transmission channels $k=1, \dots, K$ with respective $N_{t,k}$ transmission interfaces and respective $N_{r,k}$ reception interfaces for the transmission of data symbols, wherein at least two of said data symbols are

transmitted in parallel from $N_{t,k}$ transmission interfaces of at least one of said K transmission channels, which is defined by a channel matrix H_k , said method comprising calculating a respective Channel Quality Indicator (CQI) q_k for at least one of said K transmission channels, wherein at least one of said respective CQIs q_k is calculated as a function of the determinant of a linear function of the channel correlation matrix $H_k^H \cdot H_k$ of said channel matrix H_k , and scheduling at least one of said K transmission channels for the transmission of said data symbols, wherein said scheduling is at least partially based on said calculated CQIs q_k .

At least two of said data symbols are transmitted from said respective $N_{t,k}$ transmission interfaces in parallel, for instance one data symbol may be transmitted from a first transmission interface and a second data symbol from a second transmission interface. If said transmission interfaces are the antenna elements of a transmitter, said two data symbols cause interference to each other when being received at the reception interfaces of a transmission channel k . Transmitting said at least two data symbols in parallel may be considered as a vector modulation scheme, wherein data symbols are mapped to a non-orthogonal spatial resource. A representative of such as vector modulation scheme is the Bell Laboratories Layered Space Time Architecture (BLAST). In contrast to matrix modulation schemes, diversity is only used in the spatial domain without exploiting orthogonal domains as for instance the time, frequency or polarization domain.

The determinant of said matrix $aI + H_k^H H_k$ or other functions thereof exhibits a strong correlation with the BER that is achieved when data symbols are transmitted from a transmitter using the transmission channel k as prescribed by the channel matrix H_k .

With respect to the interpretation of the transmission channels and the scheduling scenarios, the above description of the types of transmission channels and scheduling scenarios for the matrix modulation applies for the vector modulation as well.

According to the method of the present invention, it is preferred that at least one receiver uses a Maximum Likelihood algorithm or a linear estimator to estimate said data symbols that are transmitted over said scheduled transmission channel and received by said receiver via said reception interfaces of said scheduled transmission channel.

Due to the use of a non-orthonormal matrix or vector modulation scheme, an estimate for the data symbols that is based on matched filtering of the matrix/vector modulated, transmitted and received data symbols may contain self-interference to a degree that renders the correct estimation of the data symbols impossible. It is then advantageous to perform maximum likelihood or reduced complexity linear equalisation techniques such as for instance a zero-forcing algorithm or a minimum mean-square error algorithm. Both approaches may advantageously be based on a sufficient set of statistics that is obtained by matched filtering of the data symbols received via the reception interfaces of said transmission channel.

According to the method of the present invention, it may be preferred that a transmission channel $k=1, \dots, K$ with the largest CQI q_k is scheduled for said transmission of said data symbols.

In particular if all K transmission channels employ the same matrix modulation, it is preferred that the transmission channel $k=1, \dots, K$ with the largest CQI q_k is scheduled. The BER is approximated closely by a strictly monotonic decreasing function of the determinant of a linear function of the ECCM R_k and the trace of the ECCM R_k . The lowest BER, or lowest power consumption when the target BER is fixed, thus is achieved when transmitting data via the transmission channel with the largest CQI q_k . Alternatively one may want to minimize the used transmission power for an expected error probability. This is performed in a similar way using the same CQI q_k .

If different transmission channels employ different matrix modulations, possibly with different rates, the calculated $CQIe_k$, characterizing the error probabilities of the transmission channels, together with the rates and modulation types characterized by $CQIm_k$, are used to select the transmission channel that provides the highest rate with a given power and expected error probability, or the transmission channel with provides the lowest error probability with an expected rate and given power, or the transmission channel that uses the least power to reach an expected error probability with an expected rate. To achieve this, the error probabilities for each transmission mode can be approximated for example in a log-log scale as linear functions of the $CQIe_k$, with suitable parameters to give the best fit. The approximate

functions are quite accurate and can be used to find solutions to the minimization problems.

According to the method of the present invention, it may be preferred that said transmission channels are transmission channels of a wireless communication system, and that said transmission and reception interfaces of said transmission channels are the transmit and receive antenna elements of one or several transmitters and one or several receivers, respectively.

Said wireless communication system may for instance be the Universal Mobile Telecommunications System (UMTS), the Global System for Mobile Communications (GSM), or a system according to the Interim Standard 95 (IS-95). Alternatively, it may be a Wireless Local Area Network (W-LAN) system like the HIPERLAN/2 or 802.11 system.

It is further proposed a computer program with instructions operable to cause a processor to perform the above-mentioned method steps.

It is further proposed a computer program product comprising a computer program with instructions operable to cause a processor to perform the above-mentioned method steps.

It is further proposed a device for scheduling at least one out of K transmission channels $k=1, \dots, K$ with respective $N_{t,k}$ transmission interfaces and respective $N_{r,k}$ reception interfaces for the transmission of data symbols modulated according to a non-orthonormal matrix modulation that modulates data symbols in both a non-orthogonal spatial domain and at least one orthogonal

domain, wherein at least one Equivalent Channel Matrix (ECM) G_k can be defined that transforms said data symbols into data symbols that have been matrix modulated, transmitted over $N_{t,k}$ transmission interfaces and received at $N_{r,k}$ reception interfaces of one of said transmission channels $k=1, \dots, K$, and wherein an Equivalent Channel Correlation Matrix (ECCM) $R_k = G_k^H \cdot G_k$ of said at least one ECM G_k is not proportional to the identity matrix, said device comprising means for calculating a respective Channel Quality Indicator (CQI) q_k for at least one of said K transmission channels, and means for scheduling at least one of said K transmission channels for the transmission of said matrix modulated data symbols, wherein said scheduling is at least partially based on said calculated CQIs q_k .

It is further proposed a transmitting station in a wireless communication system that schedules at least one out of K transmission channels $k=1, \dots, K$ with respective $N_{t,k}$ transmission interfaces and respective $N_{r,k}$ reception interfaces for the transmission of data symbols modulated according to a non-orthonormal matrix modulation that modulates data symbols in both a non-orthogonal spatial domain and at least one orthogonal domain, wherein at least one Equivalent Channel Matrix (ECM) G_k can be defined that transforms said data symbols into data symbols that have been matrix modulated, transmitted over $N_{t,k}$ transmission interfaces and received at $N_{r,k}$ reception interfaces of one of said transmission channels $k=1, \dots, K$, and wherein an Equivalent Channel Correlation Matrix (ECCM) $R_k = G_k^H \cdot G_k$ of said at least one ECM G_k is not proportional to the identity matrix, said transmitting station comprising

means for calculating a respective Channel Quality Indicator (CQI) q_k for at least one of said K transmission channels, and means for scheduling at least one of said K transmission channels for the transmission of said matrix modulated data symbols, wherein said scheduling is at least partially based on said calculated CQIs q_k .

It is further proposed a wireless communication system, comprising at least one transmitting station, and at least one receiving station, wherein a non-orthonormal matrix modulation modulates data symbols in both a non-orthogonal spatial domain and at least one orthogonal domain, wherein said matrix modulated data symbols are transmitted over at least one out of K transmission channels $k=1, \dots, K$ with respective $N_{t,k}$ transmission interfaces and respective $N_{r,k}$ reception interfaces, wherein at least one Equivalent Channel Matrix (ECM) G_k can be defined that transforms said data symbols into data symbols that have been matrix modulated, transmitted over $N_{t,k}$ transmission interfaces and received at $N_{r,k}$ reception interfaces of one of said transmission channels $k=1, \dots, K$, wherein an Equivalent Channel Correlation Matrix (ECCM) $R_k = G_k^H \cdot G_k$ of said at least one ECM G_k is not proportional to the identity matrix, wherein said at least one transmitting station calculates a respective Channel Quality Indicator (CQI) q_k for at least one of said K transmission channels, and schedules at least one of said K transmission channels for the transmission of said matrix modulated data symbols, wherein said scheduling is at least partially based on said calculated CQIs q_k .

It is further proposed a device for scheduling at least one out of K transmission channels $k=1, \dots, K$ with

respective $N_{t,k}$ transmission interfaces and respective $N_{r,k}$ reception interfaces for the transmission of data symbols, wherein at least two of said data symbols are transmitted in parallel from $N_{t,k}$ transmission interfaces of at least one of said K transmission channels, which is defined by a channel matrix H_k , said device comprising means for calculating a respective Channel Quality Indicator (CQI) q_k for at least one of said K transmission channels, wherein at least one of said respective CQIs q_k is calculated as a function of the determinant of a linear function of a channel correlation matrix $H_k^H \cdot H_k$ of said channel matrix H_k , and means for scheduling at least one of said K transmission channels for the transmission of said data symbols, wherein said scheduling is at least partially based on said calculated CQIs q_k .

It is further proposed a transmitting station that schedules at least one out of K transmission channels $k=1, \dots, K$ with respective $N_{t,k}$ transmission interfaces and respective $N_{r,k}$ reception interfaces for the transmission of data symbols, wherein at least two of said data symbols are transmitted in parallel from $N_{t,k}$ transmission interfaces of at least one of said K transmission channels, which is defined by a channel matrix H_k , said transmitting station comprising means for calculating a respective Channel Quality Indicator (CQI) q_k for at least one of said K transmission channels, wherein at least one of said respective CQIs q_k is calculated as a function of the determinant of a linear function of a channel correlation matrix $H_k^H \cdot H_k$ of said channel matrix H_k , and means for scheduling at least one of said K transmission channels for the transmission of

said data symbols, wherein said scheduling is at least partially based on said calculated CQIs q_k .

It is further proposed a wireless communication system, comprising at least one transmitting station, and at least one receiving station, wherein at least two data symbols are transmitted in parallel from $N_{t,k}$ transmission interfaces of at least one out of K transmission channels with $N_{t,k}$ transmission interfaces and $N_{r,k}$ reception interfaces, wherein said at least one transmission channel is defined by a channel matrix H_k , wherein said transmitting station calculates a respective Channel Quality Indicator (CQI) q_k for at least one of said K transmission channels, wherein said transmitting station calculates at least one of said respective CQIs q_k is as a function of the determinant of a linear function of a channel correlation matrix $H_k^H \cdot H_k$ of said channel matrix H_k , wherein said at least one transmitting station schedules at least one of said K transmission channels for the transmission of said data symbols, and wherein said scheduling is at least partially based on said calculated CQIs q_k .

These and other aspects of the invention will be apparent from and elucidated with reference to the embodiments described hereinafter.

Brief description of the figures

In the figures show:

Fig. 1: the Bit Error Ratio (BER) performance achieved when scheduling different numbers of transmission channels K in combination with an orthonormal matrix modulation

scheme with two transmit antenna elements (Space Time Transmit Diversity, STTD, dashed lines) and in combination with a single antenna transmission without STTD (solid lines) according to the prior art;

Fig. 2: the Probability Density Function (PDF) of the Signal-to-Noise Ratio (SNR) for the scheduled transmission channel when scheduling of different numbers of transmission channels K is performed in combination with an orthonormal matrix modulation scheme with two transmit antenna elements (Space Time Transmit Diversity, STTD, dashed lines) and in combination with a single antenna transmission without STTD (solid lines) according to the prior art;

Fig. 3: a table indicating the reduction of the computational complexity required to calculate R_k and $\det R_k$ for different non-orthonormal matrix modulation schemes according to the present invention;

Fig. 4: the correlation between the BER and the CQI $q_k = \det R_k$ for different orthonormal and non-orthonormal matrix modulation schemes according to the present invention;

Fig. 5A: the BER as a function of E_b/N_0 for different orthonormal (STTD) and non-orthonormal (TSTTD) matrix modulation schemes and different choices of CQI when scheduling one out of $K=2$ transmission

channels according to the present invention;

Fig. 5B: the BER as a function of E_b/N_0 for different non-orthonormal (ABBA, DSTTD) matrix modulation schemes and different choices of CQI when scheduling one out of $K=2$ transmission channels according to the present invention;

Fig. 5C: the BER as a function of E_b/N_0 for the non-orthonormal DABBA matrix modulation scheme and different choices of CQI when scheduling one out of $K=2$ transmission channels according to the present invention;

Fig. 6: the BER as a function of E_b/N_0 for scheduling in combination with non-orthonormal BLAST and TSTTD matrix modulations for different numbers of transmission channels K according to the present invention;

Fig. 7: a flowchart of a method according to the present invention; and

Fig. 8: a device according to the present invention.

Detailed description of the invention

The present invention proposes to combine non-orthonormal matrix modulation with scheduling in a selection

diversity setting. This approach may depend on the definition of the Channel Quality Indicator (CQI) that serves as a basis for the decision which of the K transmission channels are scheduled to be used for transmitting data symbols that are matrix modulated and transmitted by a transmitter.

The need for the definition of CQI's generally arises in situations where the transmission schemes need to be adapted according to the channel conditions, and different types of adaptation methods require different CQIs. Two distinct types of adaptation can be identified:

1. In systems with multiple transmission channels as basis for resource allocation, for example scheduling methods in TDMA systems which allocate time slots to the transmission channel with the "best" channel. Here the CQI_{e_k} should correlate with the performance the channel can support.
2. Choosing the right coding and modulation mode to maximize the rate or throughput for the single transmission channel, depending on the channel conditions. The decision can be based on some CQI_{m_k} threshold values after which the coding/modulation should be changed. This means comparing the performance of two different codes/modulations for one fixed channel, so CQI_{m_k} should be sensitive to the number of data streams the channel can support.

Optimally, a CQI for selection diversity is given by the bit error rate, preferably after decoding of channel codes, or the corresponding frame error rate (FER). Often a CQI based on BER after demodulation is used. An ideal

CQI has a one-to-one correspondence to the bit error rates (BER), or frame or block error rate. In single stream (and orthogonal multi-stream) channels the CQI with the best correlation to the BER/FER is the received Signal-to-Noise Ratio (SNR), which for orthonormal transmissions generalises to maximum ratio combined (MRC) channel power. This is the generic maximum C/I scheduler discussed e.g. in the Kogiantis reference.

For non-orthonormal transmissions, especially for MIMO transmissions with multiple data streams as considered by the present invention, the situation is not as simple any more. The total channel power, generalising the overall SNR or C/I, is now proportional to the trace of the channel correlation matrix $\text{tr} H_k^H H_k$. MIMO channels with the same $\text{tr} H_k^H H_k$ might still lead to very different bit/frame error rates, depending on the specifics of the transmission channel and the chosen transmission scheme.

Finding a good CQI becomes even more complicated when matrix modulation is used to encode the signals. Matrix modulators are designed to offer more diversity into the transmission, and to maximise the mutual information between transmitted and received signals. As a result they possess inherent symmetries restricting their structure. Therefore, the channel quality indicator does not depend solely on the transmission channel, but also on the way the symbols are matrix modulated and detected. This means that in principle different matrix modulation and/or detection methods may require different channel quality indicators.

According to the present invention, thus CQI's suitable for use in multiple transmission channel resource

allocation (type 1 in above classification) for non-orthonormal matrix modulated systems are proposed. In particular, comparatively simple CQI's are proposed, which for some transmission modes are - up to the simulation accuracy - in one-to-one correspondence with the BER/FER for reduced search maximum likelihood detection performed at a receiver that receives the data transmission via the scheduled transmission channel.

Before the results of Figs. 3-7 are discussed, the non-orthonormal matrix modulation schemes according to the preferred embodiments of the present invention will be briefly defined with reference to the orthonormal Alamouti Space-Time code of equation (1) or the transpose thereof (the latter is then denoted as Space-Time Transmit Diversity (STTD) modulation matrix), the signal model of equation (2), the equivalent signal model of equation (3) and the definition of the Equivalent Channel Correlation Matrix (ECCM) R_k of equation (6).

Note that the following embodiments concentrate on space-time matrix modulation techniques, but are also directly applicable to other non-orthonormal matrix modulation techniques such as space-frequency or space-polarization matrix modulation techniques. Thus the scope of the present invention is not to be understood to be limited by the following embodiments.

The non-orthonormal ABBA matrix modulation scheme

The modulation matrix of this scheme reads as

$$X_{ABBA} = \begin{bmatrix} X_A & X_B \\ X_B & X_A \end{bmatrix},$$

wherein X_A is the STTD modulation matrix as transpose of equation (1) with two data symbols x_1 and x_2 , and X_B is the STTD modulation matrix as transpose of equation (1) with two further data symbols x_3 and x_4 . For optimal performance, these symbols may be chosen as linear combinations and/or rotations of the complex modulated symbols. This applies to all matrix modulations discussed in this invention. The modulation matrix X_{ABBA} thus represents a rate 1 matrix modulator which maps 4 data symbols onto 4 transmit antenna elements in 4 symbol periods. The ECCM of the ABBA modulation scheme can be identified as

$$R_k = \begin{bmatrix} p_k & 0 & n_k & 0 \\ 0 & p_k & 0 & n_k \\ n_k & 0 & p_k & 0 \\ 0 & n_k & 0 & p_k \end{bmatrix},$$

wherein p_k is the total power of all channels and n_k denotes the strength of the interference between the two different STTD blocks X_A and X_B .

For the exemplary case of $N_t=4$ transmit antennas and $N_{k,r}=2$ receive antennas, the real-valued functions p_k and n_k are defined as:

$$p_k = \text{tr } H_k^H H_k = \frac{1}{4} \sum |h_{k,ij}|^2$$

$$n_k = \frac{1}{2} (\text{Re}(h_{k,13} h_{k,11}^*) + \text{Re}(h_{k,12} h_{k,14}^*) + \text{Re}(h_{k,23} h_{k,21}^*) + \text{Re}(h_{k,24} h_{k,22}^*)).$$

It can be seen that R_k has only two distinct eigenvalues $p_k \pm n_k$. Note that the number of distinct eigenvalues does not depend on the size of the original channel matrix,

only the explicit forms of the elements p_k , n_k do. Since the determinant is given by the product of the eigenvalues we get for ABBA:

$$\det R_k = (p_k^2 - n_k^2)^2,$$

which is proportional to $|\text{diagonal part}|^2 - |\text{off-diagonal part}|^2$ of R_k . Note that, by using the structure of the matrix modulator, we have first simplified the calculation of $R_k = H_k^H H_k$ for $N_{k,r}=2$ receive antennas from 128 complex multiplications and 112 complex additions (128 Cx, 112 C+) to 12 complex multiplications and 10 real additions (12 Cx, 10 R+), and further reduced the complexity of calculating $\det R_k$ from (40 Cx, 30 C+) to (3 Rx, 1 R+). This is a significant complexity reduction indeed. Further complexity reduction can be found if the inverse of R_k is needed for scheduling or detection; the inverse is trivially

$$R_k^{-1} = \frac{1}{p_k^2 - n_k^2} \begin{bmatrix} p_k & 0 & -n_k & 0 \\ 0 & p_k & 0 & -n_k \\ -n_k & 0 & p_k & 0 \\ 0 & -n_k & 0 & p_k \end{bmatrix}$$

Note in particular that the diagonal elements of the inverse are proportional to the trace and inversely proportional to the determinant.

Instead of the determinant of the ECCM we can use also the more general CQI of a determinant of a linear function of the ECCM. For ABBA this simplifies to $((a + p_k)^2 - n_k^2)$, where a is a constant which can be determined numerically to maximize the correlation to the

performance. For example, for QPSK modulation and reduced search maximum likelihood detection, with two receive antennas the best fit was found for $a=0.15$.

A variant of the ABBA matrix modulation is so called diagonal ABBA. The modulation matrix is written as

$$X_{ABBA} = \begin{bmatrix} X_A + X_B & 0 \\ 0 & X_A - X_B \end{bmatrix}$$

Now the ECCM is diagonal, but not orthonormal. The determinant of the ECCM is the same as for ordinary ABBA.

The non-orthonormal DABBA matrix modulation scheme

The modulation matrix of this scheme reads as

$$X_{DABBA} = \begin{bmatrix} X_A + X_C & X_B + X_D \\ X_B - X_D & X_A - X_C \end{bmatrix},$$

wherein X_A , X_B , X_C and X_D are the STTD modulation matrix as transposes of equation (1) with two data symbols each, respectively. The modulation matrix X_{DABBA} thus represents a rate 2 matrix modulator which maps 8 data symbols onto 4 transmit antenna elements in 4 symbol periods. The ECCM of the DABBA modulation scheme can be identified as

$$R_k = \begin{bmatrix} p_{k,1} + p_{k,2} & 0 & n_{k,1} & 0 & p_{k,1} - p_{k,2} & 0 & i \cdot n_{k,2} & s_k \\ 0 & p_{k,1} + p_{k,2} & 0 & n_{k,1} & 0 & p_{k,1} - p_{k,2} & -s_k & i \cdot n_{k,2} \\ n_{k,1} & 0 & p_{k,1} + p_{k,2} & 0 & i \cdot n_{k,2} & -s_k & -p_{k,1} + p_{k,2} & 0 \\ 0 & n_{k,1} & 0 & p_{k,1} + p_{k,2} & s_k & i \cdot n_{k,2} & 0 & -p_{k,1} + p_{k,2} \\ p_{k,1} - p_{k,2} & 0 & i \cdot n_{k,2} & s_k & p_{k,1} + p_{k,2} & 0 & n_{k,1} & 0 \\ 0 & p_{k,1} - p_{k,2} & -s_k & i \cdot n_{k,2} & 0 & p_{k,1} + p_{k,2} & 0 & n_{k,1} \\ i \cdot n_{k,2} & -s_k & -p_{k,1} + p_{k,2} & 0 & n_{k,1} & 0 & p_{k,1} + p_{k,2} & 0 \\ s & i \cdot n_{k,2} & 0 & -p_{k,1} + p_{k,2} & 0 & n_{k,1} & 0 & p_{k,1} + p_{k,2} \end{bmatrix}$$

where $p_{k,1}$, $p_{k,2}$ are the total channel powers from antenna pairs (1, 2) and (3, 4) to all receive antennas, respectively, $n_{k,1}$, $n_{k,2}$ are real combinations of the elements of H_k , and s_k a complex term. Again, $p_{k,1} + p_{k,2}$ on the diagonal of R_k is the total channel power, and the other terms on the off-diagonal describe the interference between the blocks. And again, R_k has only two different eigenvalues:

$$p_{k,1} + p_{k,2} \pm \sqrt{(p_{k,1} - p_{k,2})^2 + n_{k,1}^2 - n_{k,2}^2 + |s_k|^2},$$

so the determinant reads as

$$\det R_k = (4p_{k,1}p_{k,2} + n_{k,1}^2 - n_{k,2}^2 + |s_k|^2)^4.$$

The inverse of R_k can be constructed in similar fashion as for the ABBA scheme. The complexity reduction in this case is really huge, and can be found in the table of Fig. 3. Thus using the disclosed methods, scheduling of high rate, high diversity modulators of the DABBA-kind really becomes practical. Similar simple expression for $\det R_k$ can be obtained to other matrix modulators as well, due to their large internal symmetries.

For the $\det(aI + R_k)$,

$$(4 \cdot p_{k,1} \cdot p_{k,2} + (p_{k,1} + p_{k,2})(a^2 + 2a) + n_{k,1}^2 - n_{k,2}^2 + |s_k|^2)^4$$

The constant a can be again determined numerically, the best value for QPSK modulation and reduced search maximum likelihood detection, with two receive antennas was found to be 0.04.

The non-orthonormal DSTTD matrix modulation scheme

The modulation matrix of this scheme reads as

$$X_{DSTTD} = [X_A \ X_B],$$

wherein X_A and X_B are the modulation matrix given by the transposed Alamouti code of equation (1) with two data symbols each, respectively. The modulation matrix X_{DSTTD} thus represents a rate 2 matrix modulator which maps 4 data symbols onto 4 transmit antenna elements in 2 symbol periods.

The non-orthonormal TSTTD matrix modulation scheme

The modulation matrix of this scheme reads as

$$X_{TSTTD} = X_A + \frac{1}{\sqrt{7}} \begin{bmatrix} 1+i & 1+2i \\ -1+2i & 1-i \end{bmatrix} \cdot X_B,$$

wherein X_A is the STTD modulation matrix as the transpose of equation (1) with two data symbols x_1 and x_2 , and X_B is the STTD modulation matrix as the transpose of equation (1) with two further data symbols x_3 and x_4 . The modulation matrix X_{TSTTD} thus represents a rate 2 matrix modulator which maps 4 data symbols onto 2 transmit antenna elements in 2 symbol periods. The ECCM of the TSTTD modulation scheme can be identified as

$$R_k = \begin{bmatrix} p_{k,1} + p_{k,2} & 0 & p_{k,1} - p_{k,2} & s_k \\ 0 & p_{k,1} + p_{k,2} & s_k^* & p_{k,2} - p_{k,1} \\ p_{k,1} - p_{k,2} & s_k & p_{k,1} + p_{k,2} & 0 \\ s_k^* & p_{k,2} - p_{k,1} & 0 & p_{k,1} + p_{k,2} \end{bmatrix}$$

where $p_{k,1}$ and $p_{k,2}$ are the total powers from transmit antennas 1 and 2 to all receive antennas, respectively, and s_k is given as

$$s_k = 2h_{k,11}^* h_{k,12} + 2h_{k,21}^* h_{k,22} ,$$

when H_k is 2×2 . The ECCM R_k of TSTTD has the remarkable property that

$$\det R_k = (\det H_k^H H_k)^2 ,$$

indicating that in this case the equivalent-channel-based scheduling and matrix-channel-based scheduling are equivalent for the preferred CQI, leading to further simplification in calculating equivalent channel based CQIs.

Fig. 3 depicts the computational complexity encountered when calculating the ECCM R_k and its determinant $\det R_k$ for the ABBA, DABBA and TSTTD schemes directly, or with the simple closed-form expressions that are proposed by the present invention. The computational complexity is given in terms of real (RX) and complex (CX) multiplications and in terms of real (R+) and complex (C+) additions.

For the TSTTD scheme, $\det R_k$ can be calculated directly from $\det H_k$. The complexity of the proposed algorithms for calculating the determinant is the $2Q$ -th root of the complexity of the direct method, where Q is the number of complex symbols in the modulation, i.e. 4, 8 and 4 for ABBA, DABBA and TSTTD, respectively.

Fig. 4 depicts the correlation between the BER and the preferred CQI $q_k = \det R_k$ for different orthonormal (STTD) and non-orthonormal (ABBA, DSTTD, TSTTD and DABBA) matrix

modulation schemes according to the present invention. The simulations assumed Additive White Gaussian Noise (AWGN) at the receiving side of the transmission channel with an E_b/N_0 fixed at 6 dB, QPSK modulated symbols were used as data symbols, and the entries in the transmission channel matrix were assumed to be i.i.d. Rayleigh-distributed.

Apparently, the proposed CQI $q_k = \det R_k$ exhibits a strong correlation to the BER for all simulated orthonormal and non-orthonormal matrix modulation schemes. Because the BER is a monotonic function of E_b/N_0 , the qualitative results obtained at one operation point should not change with E_b/N_0 . The results should persist also for higher order modulations, since the pairwise error probabilities can be expressed in terms of pairwise error probabilities of a BPSK modulated system. The effects of other types of detection instead of reduced search ML, such as for instance linear detection algorithms as the zero-forcing block linear detector or the minimum mean-square error block linear detector is still to be studied.

Figs. 5A, 5B and 5C depict the simulated BER as a function of E_b/N_0 for different orthonormal (STTD) and non-orthonormal (TSTTD, ABBA, DSTTD and DABBA) matrix modulation schemes and different choices of CQI when scheduling one out of $K=2$ transmission channels according to the present invention. Rayleigh-fading transmission channels, AWGN at the reception interfaces of the scheduled transmission channel, and opportunistic scheduling of the transmission channel with the better CQI irrespective of the state of the potential temporal scheduling constraints such as mean packet delay, etc. was performed. For STTD and TSTTD, 16-QAM modulated data

symbols were transmitted, whereas for ABBA, DSTTD and DABBA, QPSK-modulated symbols were transmitted. Except for STTD, which has a bit rate of 2 bps, all non-orthonormal schemes have a bit rate of 4 bps.

For each matrix modulation scheme, the BER performance without scheduling (one of the $K=2$ transmission channels is chosen arbitrarily irrespective of his CQI), with CQI $q_k = \det R_k$ and CQI $q_k = \det H_k^H H_k$ is depicted. For the STTD, DABBA and TSTTD schemes, additionally the BER performance for CQI $q_k = \text{tr } R_k$ is depicted.

As can be readily seen from Figs. 5A, 5B and 5C, scheduling based on the CQI $q_k = \det R_k$ performs best for all investigated matrix modulation schemes. However, significant gains in E_b/N_0 with respect to the BER performance of a system without scheduling are also achieved for the CQIs based on the trace of R_k and the determinant of $H_k^H H_k$.

Further possible choices of CQI comprise the trace of the inverse of R_k , the condition number of H_k , the condition number of G_k , and the ratio or difference between the magnitude of the diagonal and off-diagonal parts of R_k .

The performance of vector modulation as for instance the Bell Laboratories Layered Space Time Architecture (BLAST) scheme in combination with scheduling in a selection diversity setting with $K=2$ and $K=8$ transmission channels is depicted in Fig. 6 and compared to the performance of a TSTTD scheme.

In Fig. 6, both schemes use $N_t=2$ transmit and $N_{k,r}=2$ receive antenna elements and QPSK modulated data symbols,

the noise is AWGN, and the transmission channels are i.i.d. flat Rayleigh-fading channels. In each scheme, 4 data symbols are transmitted during two time instants, wherein the modulation matrix for the BLAST scheme reads as

$$X_{BLAST} = \begin{bmatrix} x_1 & x_3 \\ x_2 & x_4 \end{bmatrix},$$

i.e. two data symbols are mapped to the non-orthogonal spatial resources in each symbol period.

Fig. 6 depicts both the results for scheduling with $K=2$ and $K=8$ transmission channels and the results without any scheduling. For the scheduling results, the transmission channel with the maximum CQI $q_k = \det R_k$ was scheduled for the TSTTD scheme, and the transmission channel with the maximum CQI $q_k = \det H_k^H H_k$ was scheduled for the BLAST case.

It is clearly visible from Fig. 6 that scheduling increases the performance of both TSTTD (dashed curves) and BLAST (solid curves) in particular when the number of transmission channels K is increased. The gains from the scheduling are larger for the BLAST scheme so the difference in its performance will decrease when more transmission channels are added. But even for $K=8$ transmission channels the TSTTD still has better performance at $BER=10^{-3}$, the difference in E_b/N_0 being approximately 1.5 dB. Also, the simulation was for opportunistic scheduling the results only show the upper limit for the scheduling gains. In practice, the gains may be smaller, which means that TSTTD may perform better for even larger number of transmission channels

than expected from the opportunistic scheduling results. Also, when the CQI is allowed to be proportional to the determinant of a linear function, i.e. $q_k = \det(aI + H_k^H H_k)$ and the constant a is adjusted for each scheme to ensure the best correlation between the CQI and BER it can be seen that the gains will increase further. In this case the optimal constant for TSTD was 0.04, and for BLAST 0.0.

Fig. 7 depicts a flow chart according to the first preferred embodiments of the present invention (the ABBA non-orthonormal matrix modulation scheme).

In a first step 10, the transmission channel index is initialised with 1, and a variable q_{max} is set to zero. Subsequently the channel matrix H_k is fetched from a storage or estimated from signals that have been received via said transmission channel before. From said channel matrix H_k , then the functions p_k and n_k are computed in a step 12. In a step 13, the CQI $q_k = \det R_k$ is computed from the functions p_k and n_k . This CQI q_k is then compared to q_{max} in a step 14, and if q_k is larger than q_{max} , q_{max} is set equal to q_k and a variable k_{max} is set equal to k in a step 15. In a step 16, the transmission channel index k is increased by 1, and it is checked in a step 17 if the transmission channel index k equals the number of transmission channels K among which scheduling is performed. If this is not the case, steps 11 to 16 are repeated until the transmission channel index k equals K . Then, in a step 18, matrix modulation according to the ABBA scheme is performed for the data symbols that are to be transmitted via the transmission channel with index k_{max} . The matrix modulated data symbols then are

transmitted in a step 19, and the flowchart is processed again starting with step 10.

Fig. 8 depicts a device according to the present invention. The device comprises respective data packet buffers 20-1 .. 20-3, which contain data packets that arrive at said device and are to be transmitted via K respective transmission channels, wherein in the example of Fig. 8, $K=3$ holds. Each packet buffer 20-1 .. 20-3 is controlled by a buffer controller 21-1..21-3, respectively. The buffer controller 21-1..21-3 signals the state of the buffers 20-1..20-3 to a scheduler 22. Furthermore, when being triggered by said scheduler 22, said buffer controllers 21-1..21-3 are capable of transferring data packets to a matrix modulator 26, wherein the data symbols contained in the data packets are matrix modulated and subsequently transmitted via transmit modules 27-1..27-4 and transmit antenna elements 28-1..28-4. Said scheduler 22 further receives input from a CQI calculation instance 23, which fetches transmission channel data from a channel storage 24, which in turn is updated by a channel estimation instance 25. The CQI calculation instance 23 determine CQIs for a number of K transmission channels based on the respective transmission channel data fetched from said channel storage 24. For instance, when the ABBA matrix modulation scheme is applied, said CQI calculation instance 23 computes the functions p_k and n_k from the entries $h_{k,ij}$ in the channel matrices H_k and then determines a CQI q_k from said functions p_k and n_k . The calculated CQIs are then fed into the scheduler 22. Based on the input from the CQI calculation instance 23 and on the input from the buffer controllers 21-1..21-3, the scheduler determines which of the K transmission channels is preferably scheduled for

the transmission of matrix modulated data symbols, so that the BER of said transmission is as low as possible. This scheduling is at least partially based on the CQIs as calculated by said instance 23. However, it may be imagined that, although the CQI_1 of transmission channel $k=1$ is larger than the CQI_2 of a transmission channel $k=2$, a data packet in data packet buffer 20-2 which is associated with transmission channel $k=2$ is matrix modulated and transmitted, because said data packet is more urgent than the data packets in the data packet buffer 20-1 that is associated with transmission channel $k=1$. The results of the scheduling is signalled to the corresponding buffer controller 21-1..21-3 which then forwards a data packet to the matrix modulator 26 for matrix modulation and transmission.

The invention has been described above by means of preferred embodiments. It should be noted that there are alternative ways and variations which are obvious to a skilled person in the art and can be implemented without deviating from the scope and spirit of the appended claims. In particular, the proposed CQIs can be used as a part in any scheduling algorithm that operates in a MIMO/MISO system, where link-specific information is taken into account when scheduling. The proposed CQI work for any non-orthonormal MIMO or MISO transmission scheme. The proposed algorithms work in any concatenated feedback/beamforming scheme, with any duplexing (FDD/TDD/mixed), multiple access (CDMA, TDMA, SDMA, OFDMA) single carrier/multicarrier (MC-CDMA/OFDMA) system. Any channel code (trellis, convolutional, turbo, block, LDPC, TCM), any modulation (PAM, PSK, QAM, higher dimensional spherical/lattice) and joint/separate channel coding/space-time coding/modulation, joint/separate

detection/decoding (linear, decorrelating, LMMSE, maximum likelihood, reduced search maximum likelihood, sphere) can be used.⁶ The only requirement may be that at some stage the transmission can be described by a vector (in non-orthogonal spatial resources) or a matrix (in non-orthogonal spatial and substantially orthogonal resources) that is actually transmitted from the non-orthogonal spatial resources (antennas/beams/polarizations) and substantially orthogonal resources (time, frequency, subcarrier, code, spatial/polarization eigenmodes).

Claims

1. A method for scheduling at least one out of K transmission channels $k=1, \dots, K$ with respective $N_{t,k}$ transmission interfaces and respective $N_{r,k}$ reception interfaces for the transmission of data symbols modulated according to a non-orthonormal matrix modulation that modulates data symbols in both a non-orthogonal spatial domain and at least one orthogonal domain, wherein at least one Equivalent Channel Matrix (ECM) G_k can be defined that transforms said data symbols into data symbols that have been matrix modulated, transmitted over $N_{t,k}$ transmission interfaces and received at $N_{r,k}$ reception interfaces of one of said transmission channels $k=1, \dots, K$, and wherein an Equivalent Channel Correlation Matrix (ECCM) $R_k = G_k^H \cdot G_k$ of said at least one ECM G_k is not proportional to the identity matrix, said method comprising:
 - calculating a respective Channel Quality Indicator (CQI) q_k for at least one of said K transmission channels, and
 - scheduling at least one of said K transmission channels for the transmission of said matrix modulated data symbols, wherein said scheduling is at least partially based on said calculated CQIs q_k .
2. The method according to claim 1, wherein said respective CQI q_k is derived for at least one of said K transmission channels from said ECCM R_k .

3. The method according to claim 2, wherein said respective CQI q_k is calculated for at least one of said K transmission channels as a function of the determinant of a linear function of said ECCM R_k .
4. The method according to claim 2, wherein said respective CQI q_k is calculated for at least one of said K transmission channels as a function of the trace of said ECCM R_k .
5. The method according to claim 2, wherein said respective CQI q_k is calculated for at least one of said K transmission channels as a function of the trace of the inverse of said ECCM R_k .
6. The method according to claim 1, wherein said respective CQI q_k is calculated for at least one of said K transmission channels as a function of the elements of a channel matrix H_k , which defines said at least one transmission channel, and wherein said function is derived from said ECCM R_k under exploitation of the structural properties of said ECCM R_k .
7. The method according to claim 1, wherein said non-orthonormal matrix modulation is an ABBA non-orthonormal matrix modulation that maps a block of 4 data symbols onto $N_{t,k}=4$ transmission interfaces in 4 units of said at least one orthogonal domain and is based on the non-orthonormal combination of two Space-Time Transmit Diversity (STTD) codes.
8. The method according to claim 6, wherein said ECCM R_k is of the form

$$R_k = \begin{bmatrix} p_k & 0 & n_k & 0 \\ 0 & p_k & 0 & n_k \\ n_k & 0 & p_k & 0 \\ 0 & n_k & 0 & p_k \end{bmatrix}, \text{ and}$$

wherein p_k and n_k are real-valued functions of the elements of said channel matrix H_k .

9. The method according to claim 8, wherein said respective CQI q_k is calculated for at least one of said K transmission channels as a function of $((a + p_k)^2 - n_k^2)^2$, and wherein a is a constant value.

10. The method according to claim 1, wherein said non-orthonormal matrix modulation is a DABBA non-orthonormal matrix modulation that maps a block of 8 data symbols onto $N_{t,k}=4$ transmission interfaces in 4 units of said at least one orthogonal domain and is based on the non-orthonormal combination of four Space-Time Transmit Diversity (STTD) codes.

11. The method according to claim 6, wherein said ECCM R_k is of the form

$$R_k = \begin{bmatrix} p_{k,1} + p_{k,2} & 0 & n_{k,1} & 0 & p_{k,1} - p_{k,2} & 0 & i \cdot n_{k,2} & s_k^* \\ 0 & p_{k,1} + p_{k,2} & 0 & n_{k,1} & 0 & p_{k,1} - p_{k,2} & -s_k & i \cdot n_{k,2} \\ n_{k,1} & 0 & p_{k,1} + p_{k,2} & 0 & i \cdot n_{k,2} & -s_k^* & -p_{k,1} + p_{k,2} & 0 \\ 0 & n_{k,1} & 0 & p_{k,1} + p_{k,2} & s_k & i \cdot n_{k,2} & 0 & -p_{k,1} + p_{k,2} \\ p_{k,1} - p_{k,2} & 0 & i \cdot n_{k,2} & s_k^* & p_{k,1} + p_{k,2} & 0 & n_{k,1} & 0 \\ 0 & p_{k,1} - p_{k,2} & -s_k & i \cdot n_{k,2} & 0 & p_{k,1} + p_{k,2} & 0 & n_{k,1} \\ i \cdot n_{k,2} & -s_k^* & -p_{k,1} + p_{k,2} & 0 & n_{k,1} & 0 & p_{k,1} + p_{k,2} & 0 \\ s & i \cdot n_{k,2} & 0 & -p_{k,1} + p_{k,2} & 0 & n_{k,1} & 0 & p_{k,1} + p_{k,2} \end{bmatrix}$$

wherein $p_{k,1}$, $p_{k,2}$, $n_{k,1}$ and $n_{k,2}$ are real-valued functions of the elements of said channel matrix H_k and wherein s_k is a complex-valued function of the elements of said channel matrix H_k .

12. The method according to claim 11, wherein said respective CQI q_k is calculated for at least one of said K transmission channels as a function of

$\left(4 \cdot p_{k,1} \cdot p_{k,2} + (p_{k,1} + p_{k,2})(a^2 + 2 \cdot a) + n_{k,1}^2 - n_{k,2}^2 + |s_k|^2\right)^4$, and wherein a is a constant value.

13. The method according to claim 1, wherein said non-orthonormal matrix modulation is a TSTTD non-orthonormal matrix modulation that maps a block of 4 data symbols onto $N_{t,k}=2$ transmission interfaces in 2 units of said at least one orthogonal domain and is based on the non-orthonormal combination of two STTD codes.

14. The method according to claim 6, wherein said ECCM R_k is of the form

$$R_k = \begin{bmatrix} p_{k,1} + p_{k,2} & 0 & p_{k,1} - p_{k,2} & s_k \\ 0 & p_{k,1} + p_{k,2} & s_k^* & p_{k,2} - p_{k,1} \\ p_{k,1} - p_{k,2} & s_k & p_{k,1} + p_{k,2} & 0 \\ s_k^* & p_{k,2} - p_{k,1} & 0 & p_{k,1} + p_{k,2} \end{bmatrix},$$

wherein $p_{k,1}$ and $p_{k,2}$ are real-valued functions of the elements of said channel matrix H_k and wherein s_k is a complex-valued function of the elements of said channel matrix H_k .

15. The method according to claim 14, wherein said respective CQI q_k is calculated for at least one of said K transmission channels as a function of $(\det(aI + H_k^H H_k))$, and wherein a is a constant value.

16. The method according to claim 1, wherein said non-orthonormal matrix modulation is a DSTTD non-orthonormal matrix modulation that maps a block of 4

data symbols onto $N_{t,k}=4$ transmission interfaces in 2 units of said at least one orthogonal domain and is based on the non-orthonormal combination of two STTD codes.

17. The method according to claim 1, wherein said non-orthonormal matrix modulation comprises space-time or space-frequency coding.
18. The method according to claim 1, wherein said non-orthonormal matrix modulation comprises a combination of at least two orthonormal matrix modulations.
19. A method for scheduling at least one out of K transmission channels $k=1, \dots, K$ with respective $N_{t,k}$ transmission interfaces and respective $N_{r,k}$ reception interfaces for the transmission of data symbols, wherein at least two of said data symbols are transmitted in parallel from $N_{t,k}$ transmission interfaces of at least one of said K transmission channels, which is defined by a channel matrix H_k , said method comprising:
 - calculating a respective Channel Quality Indicator (CQI) q_k for at least one of said K transmission channels, wherein at least one of said respective CQIs q_k is calculated as a function of the determinant of a linear function of a channel correlation matrix $H_k^H \cdot H_k$ of said channel matrix H_k , and
 - scheduling at least one of said K transmission channels for the transmission of said data symbols, wherein said scheduling is at least partially based on said calculated CQIs q_k .

20. The method according to any of the claims 1 and 19, wherein at least one receiver uses a Maximum Likelihood algorithm or a linear estimator to estimate said data symbols that are transmitted over said scheduled transmission channel and received by said receiver via said reception interfaces of said scheduled transmission channel.
21. The method according to any of the claims 1 and 19, wherein a transmission channel $k=1, \dots, K$ with the largest CQI q_k is scheduled for said transmission of said data symbols.
22. The method according to claim 1, wherein said transmission channels are transmission channels of a wireless communication system, and wherein said transmission and reception interfaces of said transmission channels are the transmit and receive antenna elements of one or several transmitters and one or several receivers, respectively.
23. A computer program with instructions operable to cause a processor to perform the method steps of any of the claims 1 and 19.
24. A computer program product comprising a computer program with instructions operable to cause a processor to perform the method steps of any of the claims 1 and 19.
25. A device for scheduling at least one out of K transmission channels $k=1, \dots, K$ with respective $N_{t,k}$ transmission interfaces and respective $N_{r,k}$ reception interfaces for the transmission of data symbols

modulated according to a non-orthonormal matrix modulation that modulates data symbols in both a non-orthogonal spatial domain and at least one orthogonal domain, wherein at least one Equivalent Channel Matrix (ECM) G_k can be defined that transforms said data symbols into data symbols that have been matrix modulated, transmitted over $N_{t,k}$ transmission interfaces and received at $N_{r,k}$ reception interfaces of one of said transmission channels $k=1, \dots, K$, and wherein an Equivalent Channel Correlation Matrix (ECCM) $R_k = G_k^H \cdot G_k$ of said at least one ECM G_k is not proportional to the identity matrix, said device comprising:

- means for calculating a respective Channel Quality Indicator (CQI) q_k for at least one of said K transmission channels, and
- means for scheduling at least one of said K transmission channels for the transmission of said matrix modulated data symbols, wherein said scheduling is at least partially based on said calculated CQIs q_k .

26. A transmitting station in a wireless communication system that schedules at least one out of K transmission channels $k=1, \dots, K$ with respective $N_{t,k}$ transmission interfaces and respective $N_{r,k}$ reception interfaces for the transmission of data symbols modulated according to a non-orthonormal matrix modulation that modulates data symbols in both a non-orthogonal spatial domain and at least one orthogonal domain, wherein at least one Equivalent Channel Matrix (ECM) G_k can be defined that transforms said data symbols into data symbols that have been matrix modulated, transmitted over $N_{t,k}$ transmission interfaces and received at $N_{r,k}$ reception interfaces of one of said transmission channels $k=1, \dots, K$, and wherein an

Equivalent Channel Correlation Matrix (ECCM) $R_k = G_k^H \cdot G_k$ of said at least one ECM G_k is not proportional to the identity matrix, said transmitting station comprising:

- means for calculating a respective Channel Quality Indicator (CQI) q_k for at least one of said K transmission channels, and
- means for scheduling at least one of said K transmission channels for the transmission of said matrix modulated data symbols, wherein said scheduling is at least partially based on said calculated CQIs q_k .

27. A wireless communication system, comprising:

- at least one transmitting station, and
 - at least one receiving station,
- wherein a non-orthonormal matrix modulation modulates data symbols in both a non-orthogonal spatial domain and at least one orthogonal domain, wherein said matrix modulated data symbols are transmitted over at least one out of K transmission channels $k=1, \dots, K$ with respective $N_{t,k}$ transmission interfaces and respective $N_{r,k}$ reception interfaces, wherein at least one Equivalent Channel Matrix (ECM) G_k can be defined that transforms said data symbols into data symbols that have been matrix modulated, transmitted over $N_{t,k}$ transmission interfaces and received at $N_{r,k}$ reception interfaces of one of said transmission channels $k=1, \dots, K$, wherein an Equivalent Channel Correlation Matrix (ECCM) $R_k = G_k^H \cdot G_k$ of said at least one ECM G_k is not proportional to the identity matrix, wherein said at least one transmitting station calculates a respective Channel Quality Indicator (CQI) q_k for at least one of said K transmission channels, and schedules at least one of said K transmission channels

for the transmission of said matrix modulated data symbols, wherein said scheduling is at least partially based on said calculated CQIs q_k .

28. A device for scheduling at least one out of K transmission channels $k=1, \dots, K$ with respective $N_{t,k}$ transmission interfaces and respective $N_{r,k}$ reception interfaces for the transmission of data symbols, wherein at least two of said data symbols are transmitted in parallel from $N_{t,k}$ transmission interfaces of at least one of said K transmission channels, which is defined by a channel matrix H_k , said device comprising:
- means for calculating a respective Channel Quality Indicator (CQI) q_k for at least one of said K transmission channels, wherein at least one of said respective CQIs q_k is calculated as a function of the determinant of a linear function of a channel correlation matrix $H_k^H \cdot H_k$ of said channel matrix H_k , and
 - means for scheduling at least one of said K transmission channels for the transmission of said data symbols, wherein said scheduling is at least partially based on said calculated CQIs q_k .
29. A transmitting station that schedules at least one out of K transmission channels $k=1, \dots, K$ with respective $N_{t,k}$ transmission interfaces and respective $N_{r,k}$ reception interfaces for the transmission of data symbols, wherein at least two of said data symbols are transmitted in parallel from $N_{t,k}$ transmission interfaces of at least one of said K transmission channels, which is defined by a channel matrix H_k , said transmitting station comprising:

- means for calculating a respective Channel Quality Indicator (CQI) q_k for at least one of said K transmission channels, wherein at least one of said respective CQIs q_k is calculated as a function of the determinant of a linear function of a channel correlation matrix $H_k^H \cdot H_k$ of said channel matrix H_k , and
- means for scheduling at least one of said K transmission channels for the transmission of said data symbols, wherein said scheduling is at least partially based on said calculated CQIs q_k .

30. A wireless communication system, comprising

- at least one transmitting station, and
 - at least one receiving station,
- wherein at least two data symbols are transmitted in parallel from $N_{t,k}$ transmission interfaces of at least one out of K transmission channels with $N_{t,k}$ transmission interfaces and $N_{r,k}$ reception interfaces, wherein said at least one transmission channel is defined by a channel matrix H_k , wherein said transmitting station calculates a respective Channel Quality Indicator (CQI) q_k for at least one of said K transmission channels, wherein said transmitting station calculates at least one of said respective CQIs q_k as a function of the determinant of a linear function of a channel correlation matrix $H_k^H \cdot H_k$ of said channel matrix H_k , wherein said at least one transmitting station schedules at least one of said K transmission channels for the transmission of said data symbols, and wherein said scheduling is at least partially based on said calculated CQIs q_k .

1/9

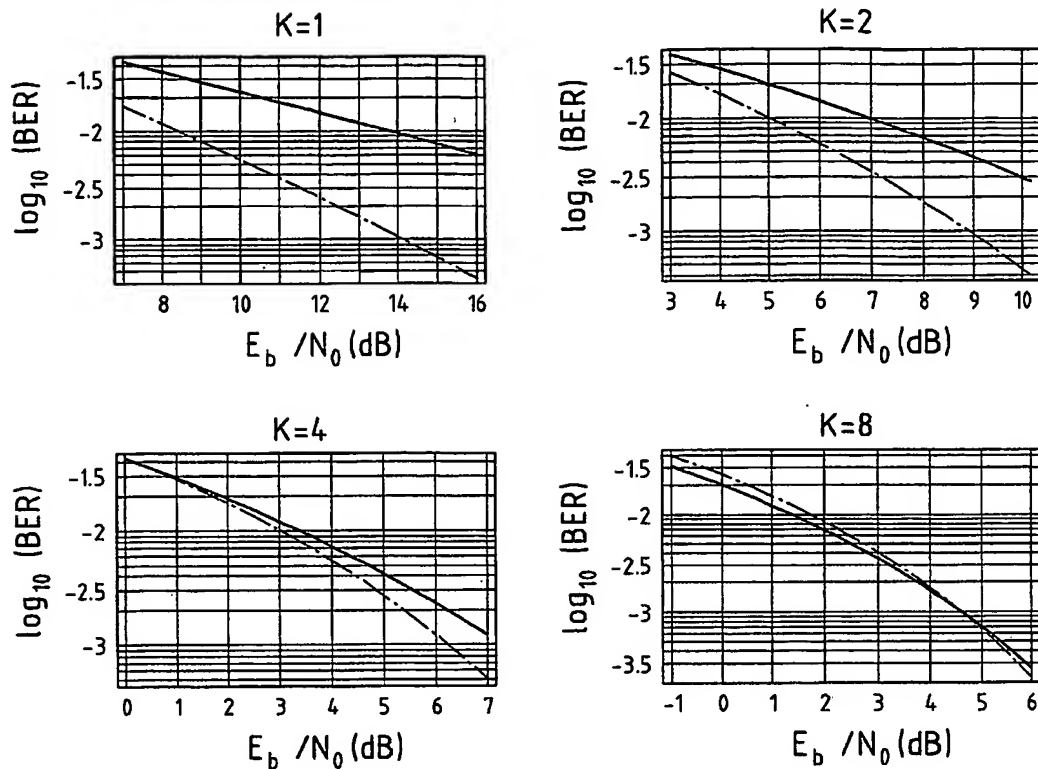


Fig.1 Prior Art

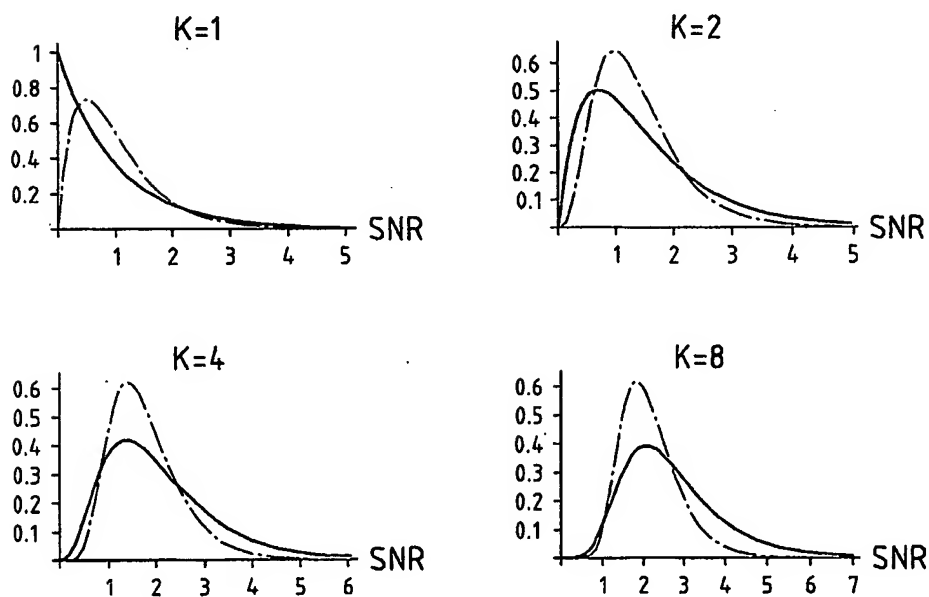


Fig.2 Prior Art

modulation	calculation method	R_k		$\det R_k$	
		multipls	adds	multipls	adds
ABBA	direct	128 Cx	112 C+	40 Cx	30 C+
	proposed	12 Cx	10 C+	3 Rx	1 R+
DABBA	direct	512 Cx	448 C+	79176 Cx	18880 C+
	proposed	20 Cx	12 R+ and 3 C+	7 Rx	3 R+
TSTTD	direct	64 Cx	48 C+	40 Cx	30 C+
	proposed	6 Cx	2 R+ and 1 C+	total R_k and $\det R_k$ 3 Cx	1 C+

Fig.3

3/9



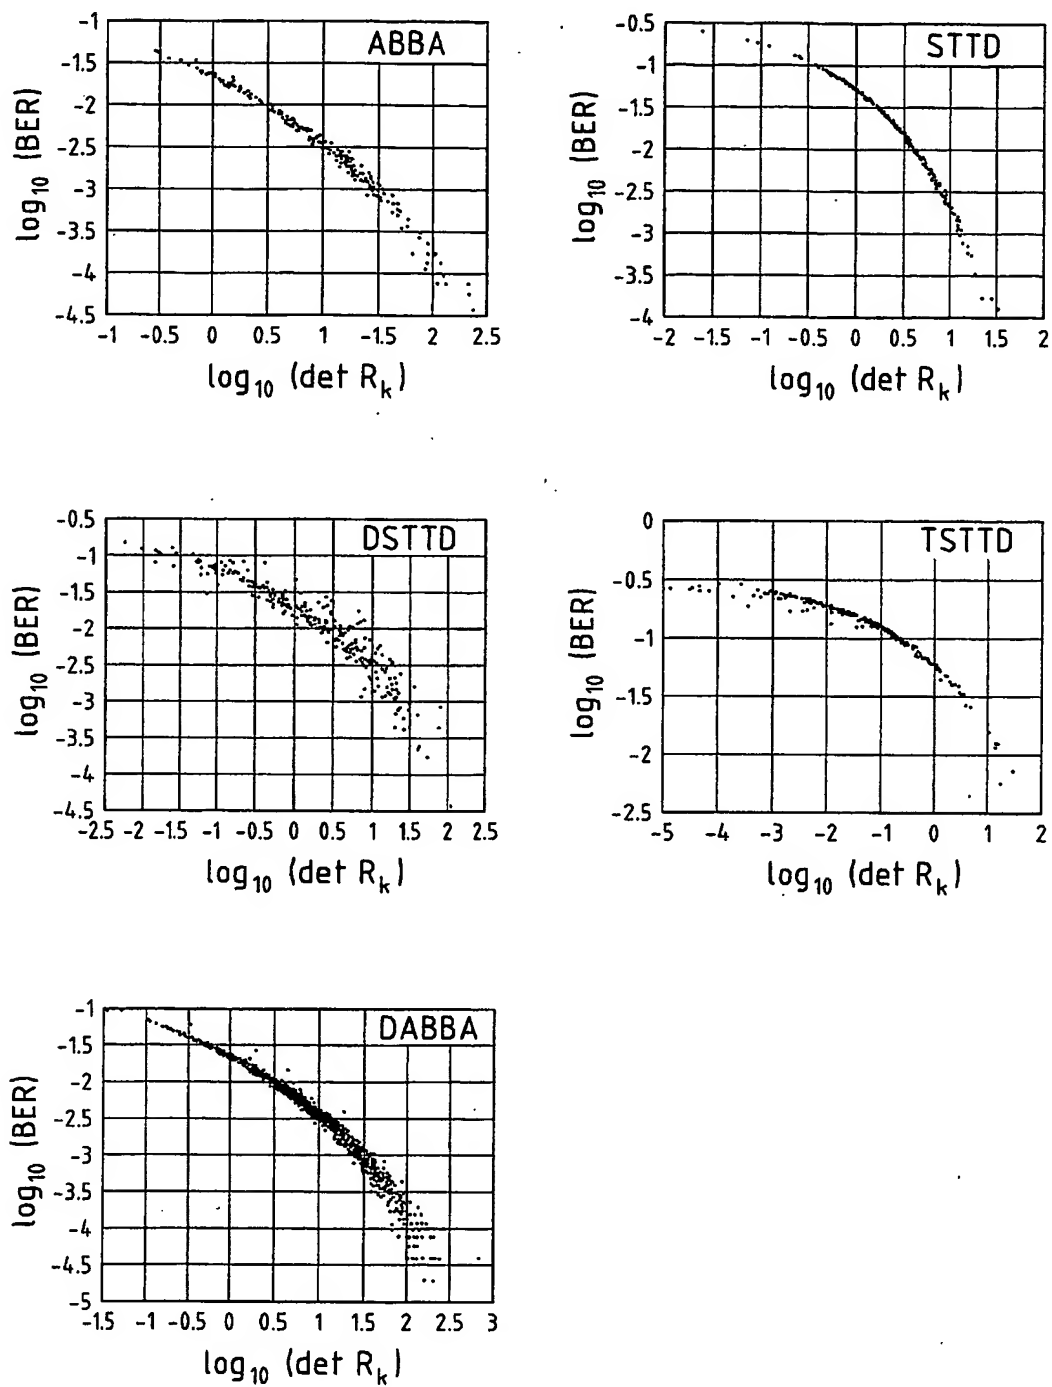


Fig.4



4/9

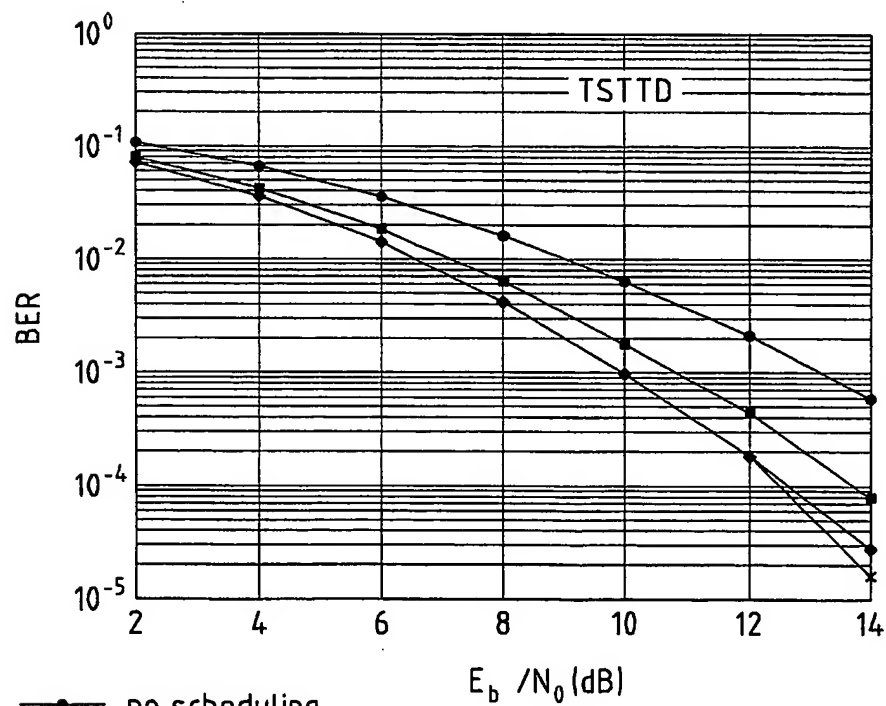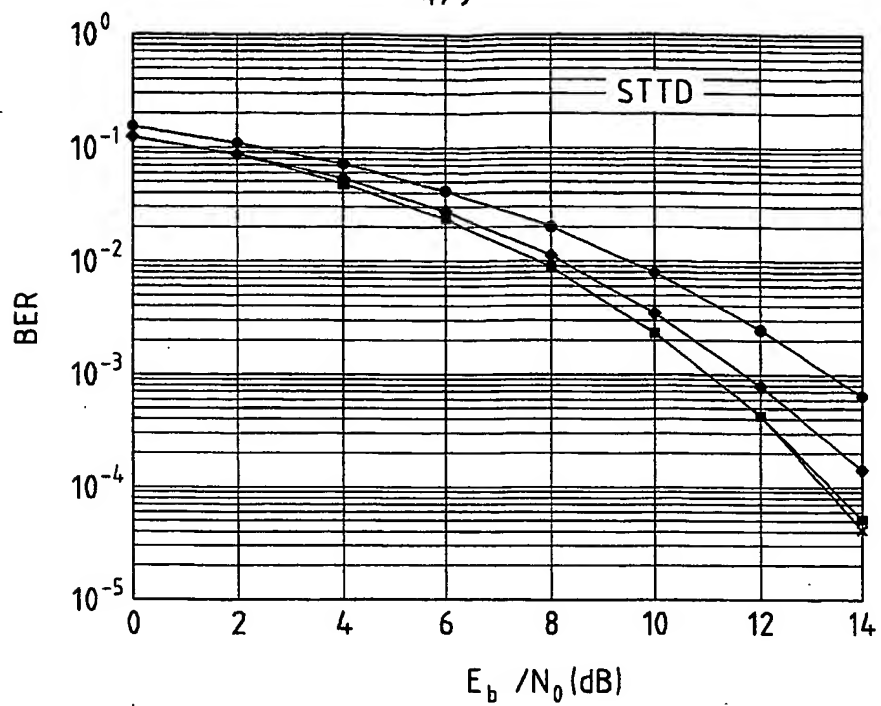

- no scheduling
- ×— CQI $q_k = \det R_k$
- CQI $q_k = \text{tr } R_k$
- ◆— CQI $q_k = \det H_k^H H_k$


Fig.5A

5/9

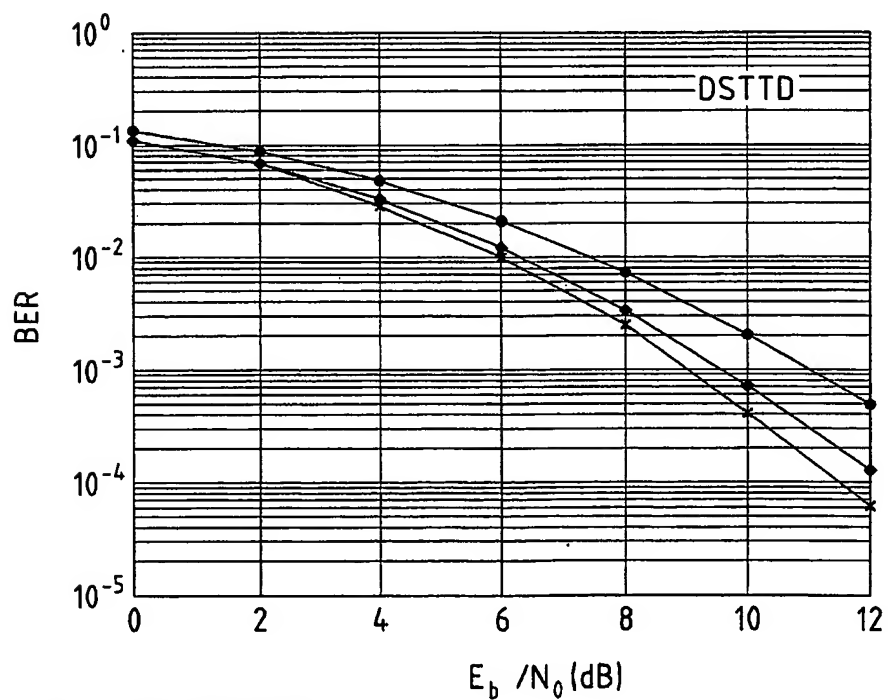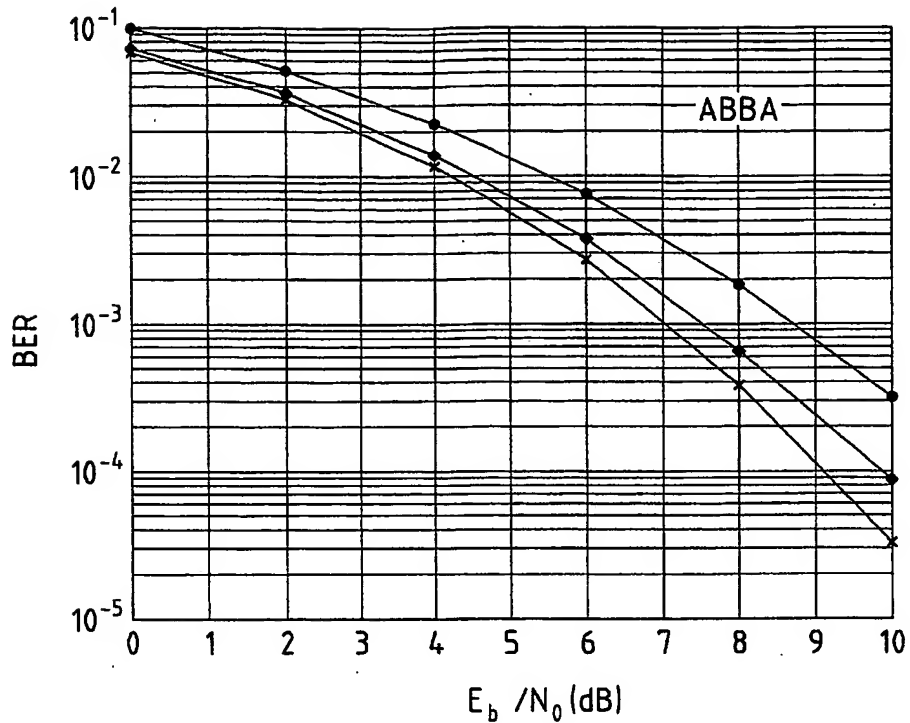

- no scheduling
- ×— CQI $q_k = \det R_k$
- ◆— CQI $q_k = \det H_k^H H_k$


Fig.5B

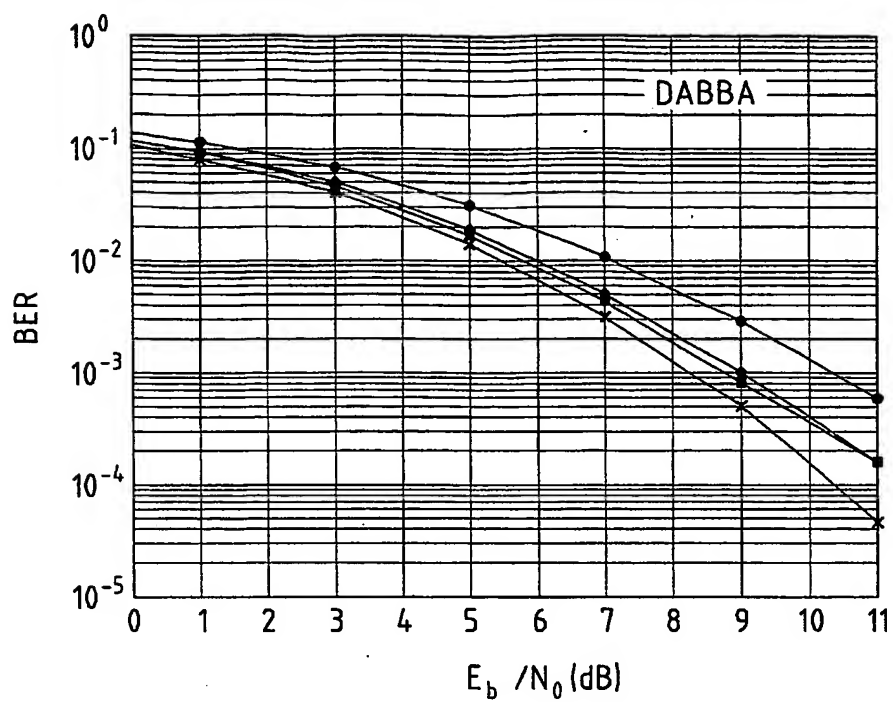

- no scheduling
- ×— CQI $q_k = \det R_k$
- CQI $q_k = \text{tr } R_k$
- ◆— CQI $q_k = \det H_k^H H_k$

Fig.5C

7/9

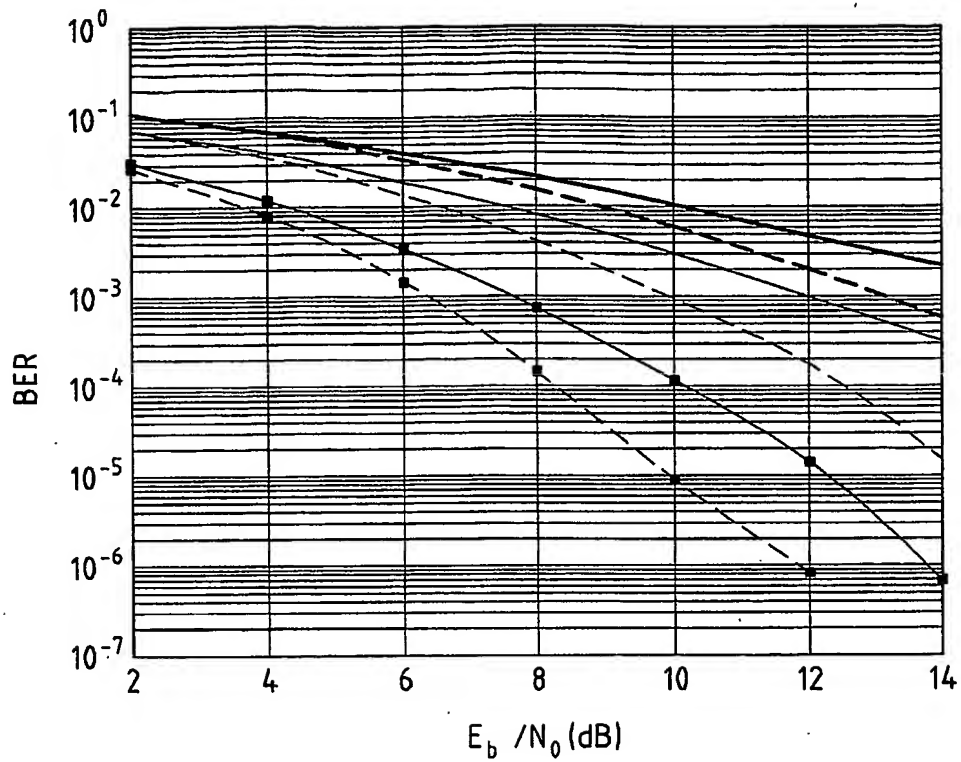

- BLAST : no scheduling
- BLAST : CQI $q_k = \det H_k^H H_k$, $K=2$
- BLAST : CQI $q_k = \det H_k^H H_k$, $K=8$
- - - TSTTD : no scheduling
- - - TSTTD : CQI $q_k = \det R_k$, $K=2$
- -■- TSTTD : CQI $q_k = \det R_k$, $K=8$

Fig.6

8/9

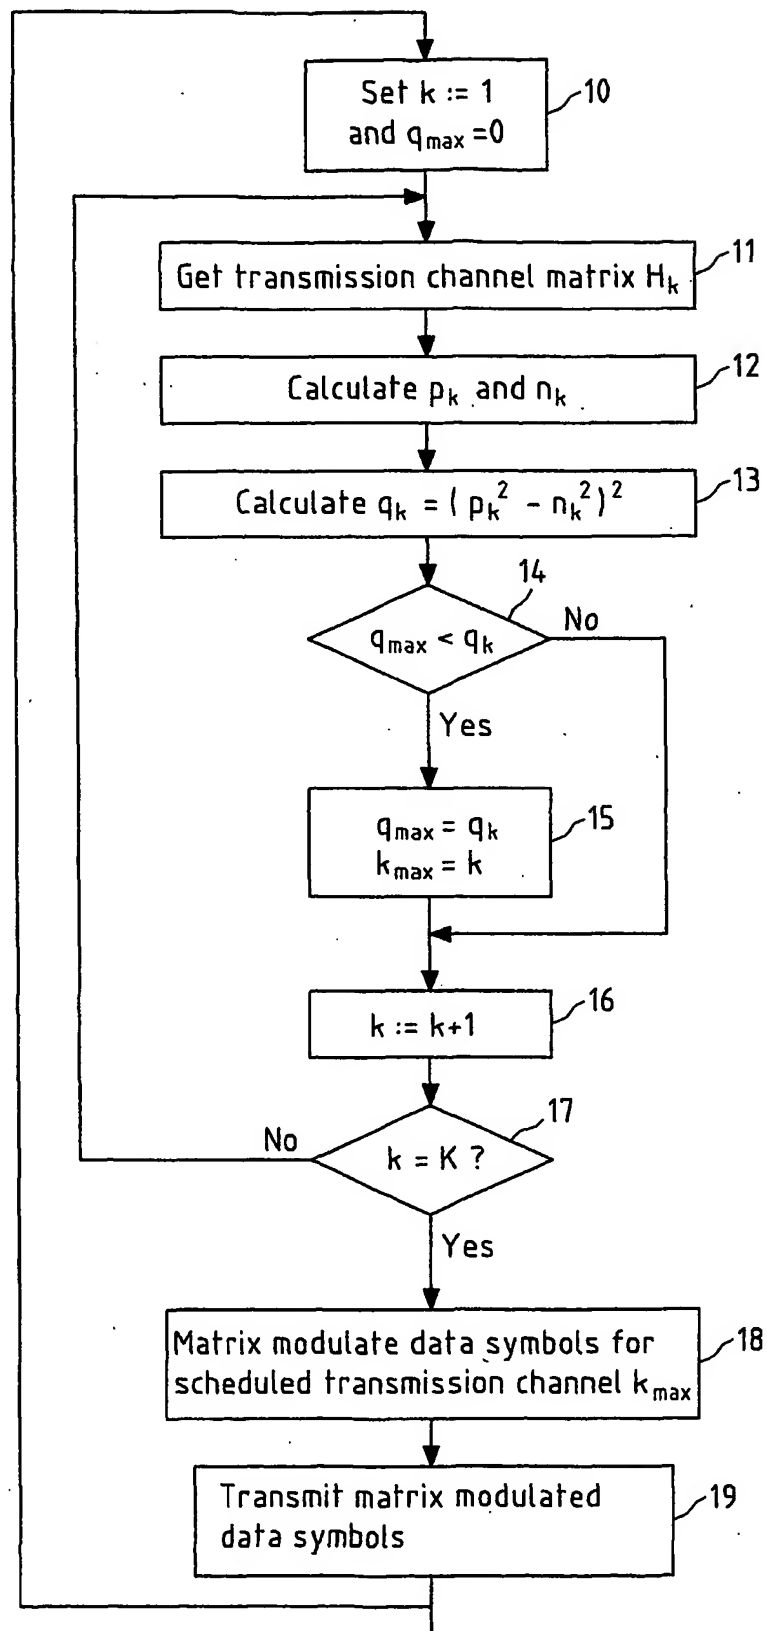


Fig.7

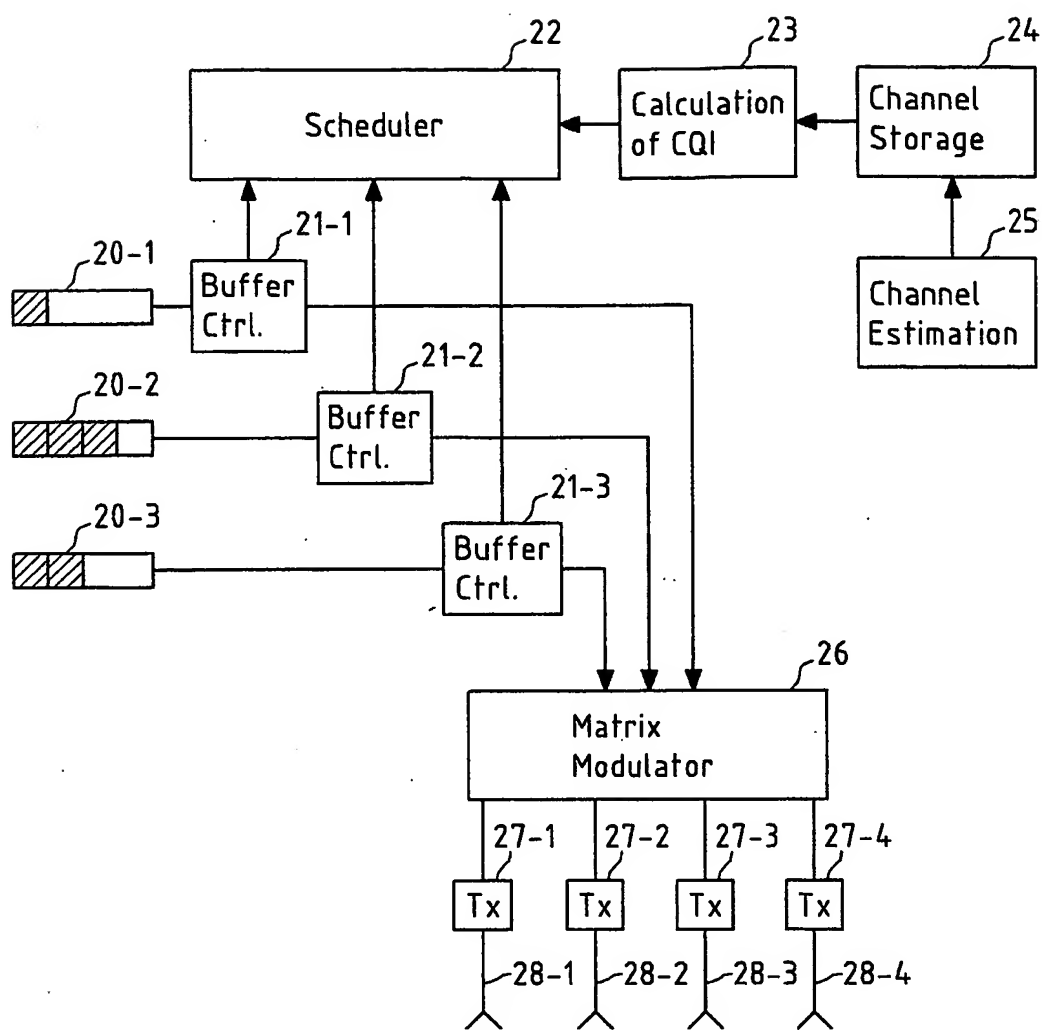


Fig.8

INTERNATIONAL SEARCH REPORT

International Application No

PC 1, B 03/05587

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H04L1/06

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04L H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

INSPEC, EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	GOZALI R ET AL: "On the performance of scheduling over space-time architectures" 2002 IEEE 56TH VEHICULAR TECHNOLOGY CONFERENCE PROCEEDINGS (CAT. NO.02CH37359), 2002 IEEE 56TH VEHICULAR TECHNOLOGY CONFERENCE PROCEEDINGS, VANCOUVER, BC, CANADA, 24-28 SEPT. 2002, pages 415-419 vol.1, XP002285917 2002, Piscataway, NJ, USA, IEEE, USA ISBN: 0-7803-7467-3 Section I-III abstract --- -/--	1-30



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

24 June 2004

Date of mailing of the international search report

28. 07. 2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

ÅSA RYDENIUS/JAA

INTERNATIONAL SEARCH REPORT

International Application No

PCT/IB 03/05587

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	GOZALI R ET AL: "The impact of multiuser diversity on space-time block coding" IEEE COMMUNICATIONS LETTERS, MAY 2003, IEEE, USA, vol. 7, no. 5, pages 213-215, XP002285918 ISSN: 1089-7798 cited in the application Section I-II abstract	1-30
A	--- US 2002/177447 A1 (HOWARD STEVEN J ET AL) 28 November 2002 (2002-11-28) paragraph [0039] paragraph [0139] - paragraph [0152] abstract	1-30
A	--- WO 03 041300 A (QUALCOMM INC) 15 May 2003 (2003-05-15) paragraph [1113] - paragraph [1114] paragraph [1210] - paragraph [1223] abstract	1-30
A	--- WO 03 081938 A (NORTEL NETWORKS LTD) 2 October 2003 (2003-10-02) paragraph [0007] - paragraph [0009] abstract -----	1-30

INTERNATIONAL SEARCH REPORT

Int: inal Application No
PCT/IB 03/05587

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
US 2002177447	A1	28-11-2002	CA	2446930 A1	21-11-2002
			EP	1393466 A1	03-03-2004
			WO	02093782 A1	21-11-2002

WO 03041300	A	15-05-2003	US	2003125040 A1	03-07-2003
			WO	03041300 A1	15-05-2003

WO 03081938	A	02-10-2003	WO	03081938 A1	02-10-2003
